
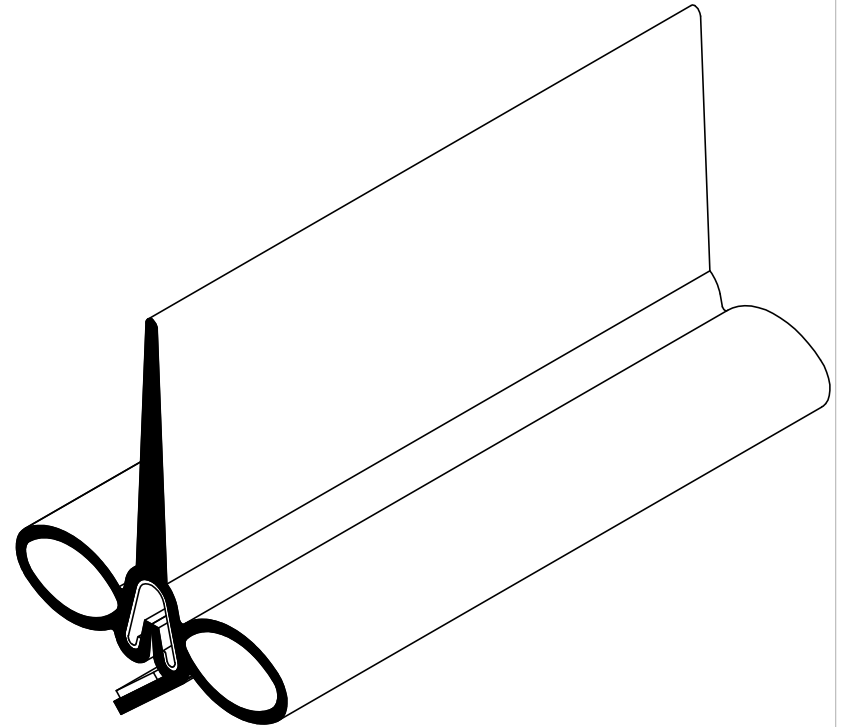


NOTES:

- 1) CLOSED CELL SPONGE RUBBER (DENSITY 0.725 G/CM³)
- 2) SD-487 SPRING STEEL (0.030 LB/FT)
- 3) 3/8" 3M ST-1200 HEAT ACTIVATED TAPE (0.006 LB/FT)

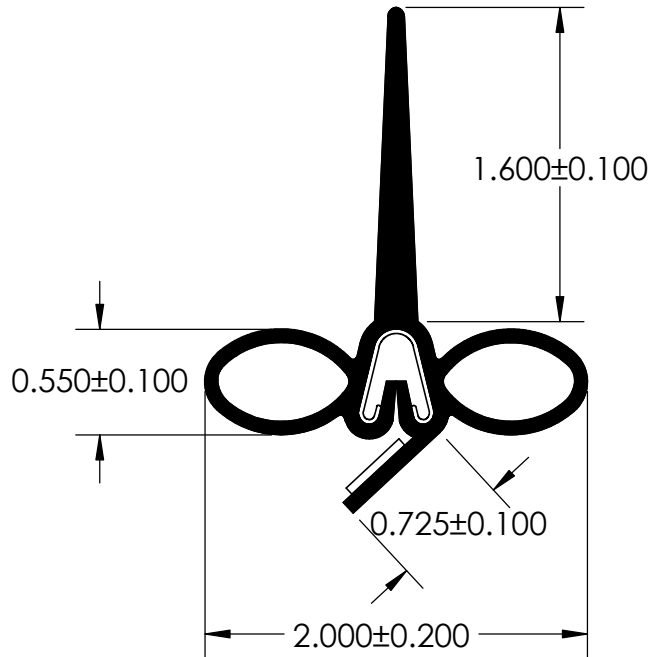

UNI-GRIP, INC.

9823 STATE ROUTE 53 N
UPPER SANDUSKY, OHIO 43351

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3	TITLE: ED-50470-T			
	WEIGHT 0.214 LB/FT	SIZE A	DWG. NO. UG-1-SO-487-ST-375-TP-005	REV A	
	DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(111416)	ASTM D1056 2A3			
	ASTM D2000 N/A				
P:\Engineering\Prints\Slide Out Seals\ED-50470-T UG-1-SO-487-ST-375-TP-005		SCALE: 1:1	DR. BY L. CLARK	DATE 9/6/2017	SHEET 1 OF 1