

NOTES:

1)CLOSED CELL EPDM SPONGE RUBBER (0.725 G/CM³)



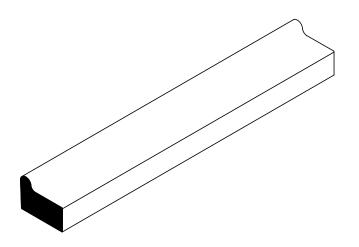



| | | | 250-20-20-50-5 | | |
|--|--|---|----------------|----------------------|----------|
| | PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED. DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(111416) | UNLESS OTHERWISE SPECIFIED: | TITLE: | | |
| | | DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3 | IR-620 | | |
| | | 0.065 LB/FT | | | |
| | | ASTM D1056 2A3 | SIZE DWG. NO | UG-1-RE-010 | REV |
| | | ASTM D2000 N/A | A | | А |
| P:\Engineering\Prints\Rubber Extrusions\IR-620 L | JG-1-RE-010 | SCALE: 1:1 | DR. BY C. VENT | DATE 12/13/2017 SHEE | T 1 OF 1 |
| 5 | 4 | 3 | 2 | 1 | |