

NOTES:

1) CLOSED CELL EPDM SPONGE RUBBER (0.250 G/CM³)



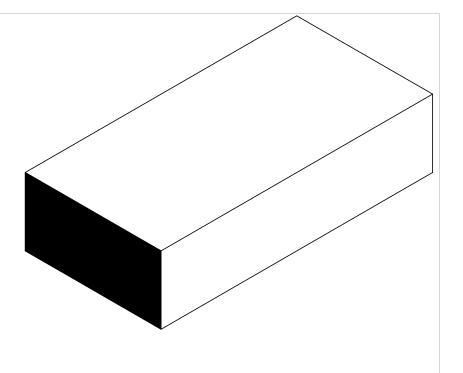



UNI-GRIP, INC.

9823 STATE ROUTE 53 N UPPER SANDUSKY, OHIO 43351

REVISION BLOCK			ON BLOCK	PROPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:		: TITLE:				
REV.	DATE	DATE R. By CHANGES MAI		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3		3	RF-129			
Α				PROPERTY OF UNI-GRIP,INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP,INC. IS PROHIBITED. DOCUMENT CONTROL NUMBER	WEIGHT				INL IZ/		
В					0.227 LB/FT						
С					ASTM D1056	2A2	SIZE	DWG. NO.		REV	REV
D					ASTM D2000	− Λ		UG-1-RE-129			
Е				UG-1-EN-001-FR-(080918)	N/A						
P:∖Er	ngineeri	ng\Pri	nts\Master Prints\Rubber Extr	rusion\RE-129 UG-1-RE-129	SCALE:	1:1	DR. BY C	. VENT	DATE 7/19/2022	SHEET 1 OF	- 1