

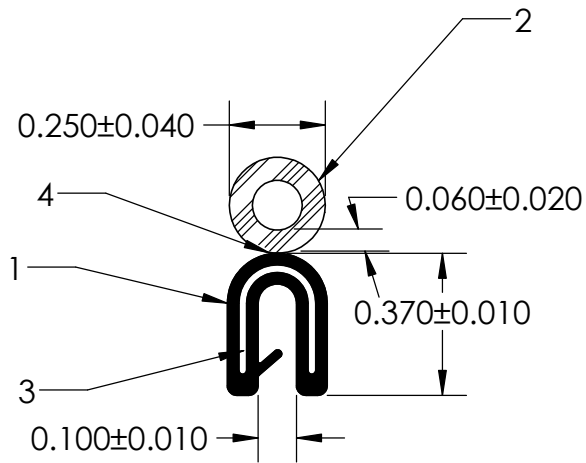


NOTES:

- 1) 80 DUROMETER BLACK PVC (1.370 G/CM<sup>3</sup>)
- 2) CLOSED CELL EPDM SPONGE RUBBER (0.380 G/CM<sup>3</sup>)
- 3) 5/8" STAMPED STEEL CARRIER (0.032 LB/FT)
- 4) CYANOACRYLATE ADHESIVE

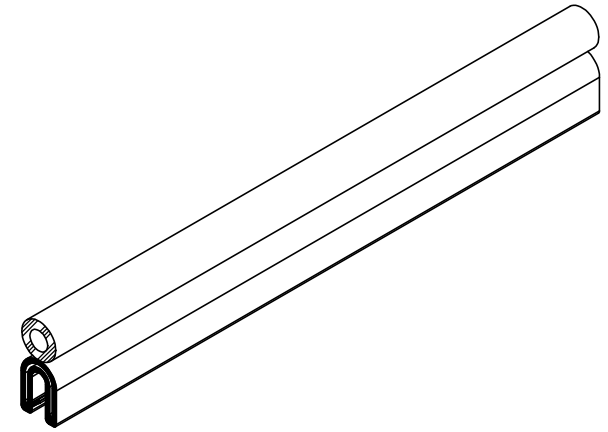

DETAIL A  
SCALE 2 : 1



**UNI-GRIP, INC.**

9823 STATE ROUTE 53 N  
UPPER SANDUSKY, OHIO 43351

REVISION BLOCK				PROPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:	TITLE:				
REV.	DATE	R. By	CHANGES MADE	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3	SD-010 W/250 TOP BULB				
A									WEIGHT 0.079 LB/FT	
B					ASTM D1056 2A4	SIZE <b>A</b>	DWG. NO. UG-1-GL-625-FS-045	REV		
C					DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(080918)	ASTM D2000 N/A				
D										
E										
P:\Engineering\Prints\Master Prints\Glue Line\SD-010 W/250 TOP BULB UG-1-GL-625-FS-045				SCALE:	1:1	DR. BY	C. VENT	DATE	9/24/2020	SHEET 1 OF 1