
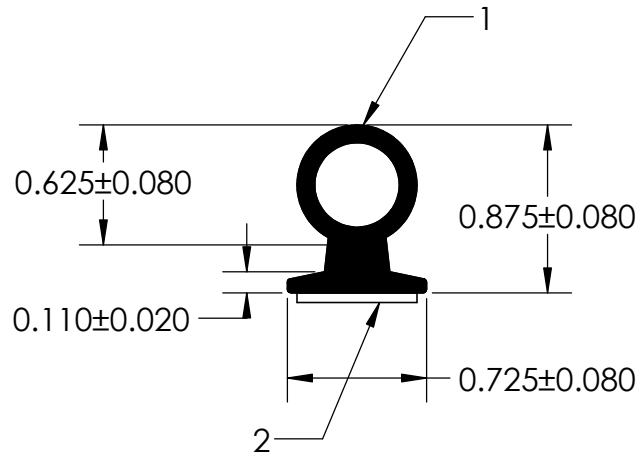


NOTES:

- 1) CLOSED CELL EPDM SPONGE RUBBER (0.750 G/CM³)
- 2) 5/8" ST-1200 3M HEAT ACTIVATED TAPE (0.012 LB/FT)

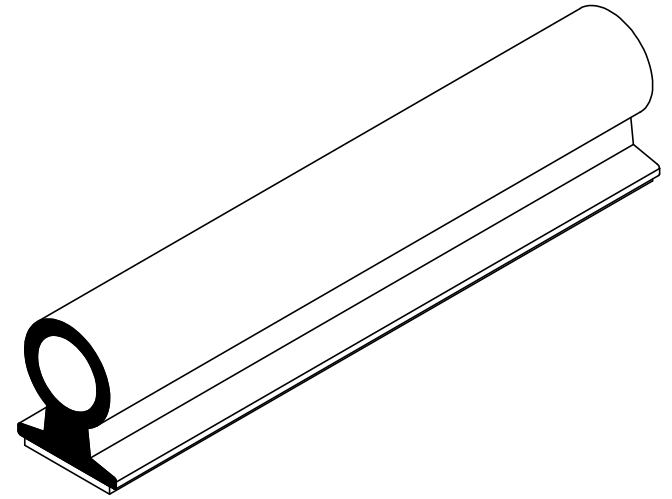

UNI-GRIP, INC.

9823 STATE ROUTE 53 N
UPPER SANDUSKY, OHIO 43351

REVISION BLOCK				PROPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:	TITLE:				
REV.	DATE	REVIEWED BY	CHANGES MADE	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3	SD-117-T				
A										
B						WEIGHT	0.106 LB/FT			
C						ASTM D1056	2A4	SIZE	DWG. NO.	REV
D						DOCUMENT CONTROL NUMBER	ASTM D2000	A	UG-1-TS-625-TP-146	A
E				UG-1-EN-001-FR-(103018)	N/A	DR. BY	C. VENT	DATE		
P:\Engineering\Prints\Tape Seals\SD-117-T UG-1-TS-625-TP-146				SCALE:	1:1	DATE	3/30/2020	SHEET 1 OF 1		