
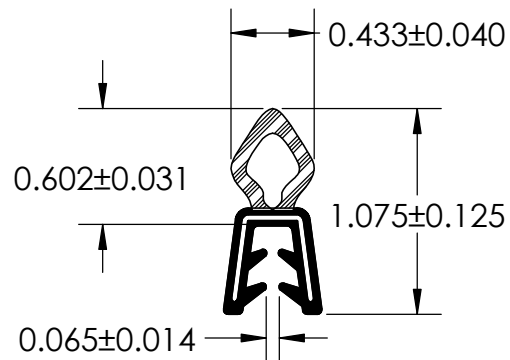


NOTES:

- 1) CLOSED CELL EPDM SPONGE RUBBER (0.750 G/CM³)
- 2) 70 DUROMETER EPDM DENSE RUBBER (1.200 G/CM³)
- 3) 1.120" WIRE CARRIER (0.024 LB/FT)

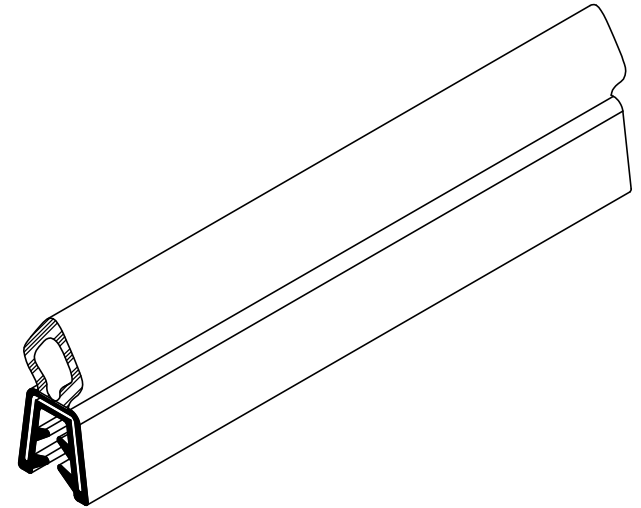

UNI-GRIP, INC.

9823 STATE ROUTE 53 N
UPPER SANDUSKY, OHIO 43351

REVISION BLOCK				PROPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:	TITLE:				
REV.	DATE	APPROVED BY	CHANGES MADE	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3	SD-12162				
A	8/9/18	GS	Added a revision block							
B					WEIGHT	DWG. NO.				
C					0.137 LB/FT					
D					ASTM D1056	2A4	UG-1-DU-1120-WR-087		REV A	
E				ASTM D2000	3BA711 A14 B13 C12 F17					
P:\Engineering\Prints\Dual Durometer\SD-12162				DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(111416)	SCALE: 1:1	DR. BY	C. VENT	DATE	9/26/2018	SHEET 1 OF 1