
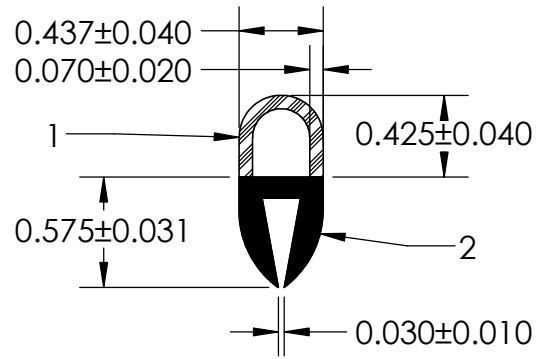


NOTES:

- 1) CLOSED CELL EPDM SPONGE RUBBER (0.750 G/CM<sup>3</sup>)
- 2) 70 DUROMETER EPDM DENSE RUBBER (1.200 G/CM<sup>3</sup>)

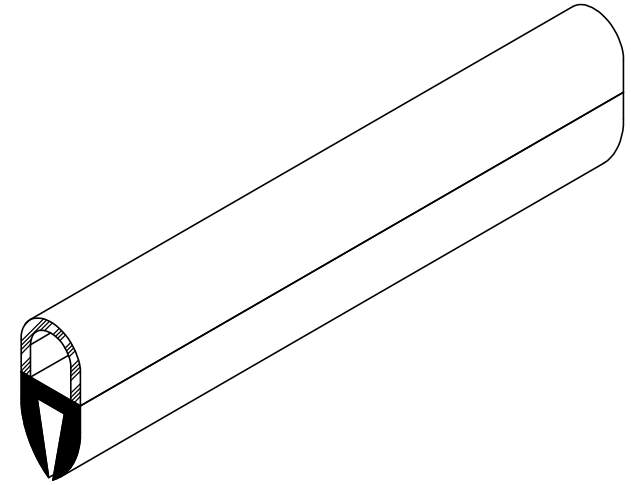

**UNI-GRIP, INC.**

9823 STATE ROUTE 53 N  
UPPER SANDUSKY, OHIO 43351

REVISION BLOCK				PROPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:	TITLE:		
REV.	DATE	REVIEWED BY	CHANGES MADE	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3	SD-12408		
A								
B					WEIGHT	SIZE		
C					0.135 LB/FT			
D					ASTM D1056	UG-1-DU-111		REV
E				2A4	1			
DOCUMENT CONTROL NUMBER				ASTM D2000			DR. BY	
UG-1-EN-001-FR-(103018)				3BA711 A14 B13 C12 F17	C. VENT			DATE
P:\Engineering\Prints\Dual Duormeter\SD-12408 UG-1-DU-111				SCALE:	1:1	5/8/2019		SHEET 1 OF 1