
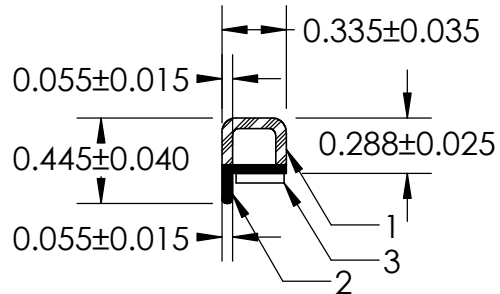


NOTES:

- 1) CLOSED CELL EPDM SPONGE RUBBER (0.750 G/CM<sup>3</sup>)
- 2) 70 DUROMETER EPDM DENSE RUBBER (1.200 G/CM<sup>3</sup>)
- 3) 1/4" ST-1200 3M HEAT ACTIVATED TAPE (0.004 LB/FT)

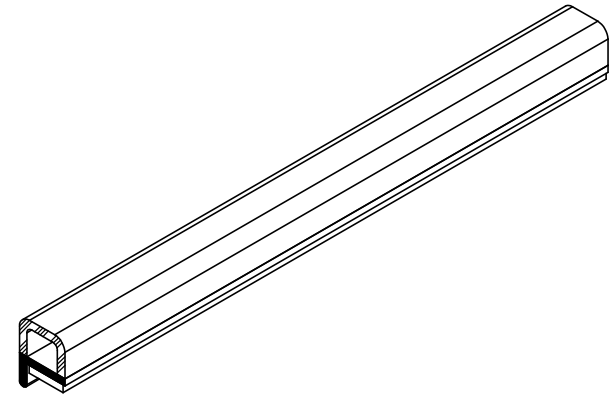


**UNI-GRIP, INC.**  
 9823 STATE ROUTE 53 N  
 UPPER SANDUSKY, OHIO 43351

<b>REVISION BLOCK</b>				PROPRIETARY AND CONFIDENTIAL:  THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.	UNLESS OTHERWISE SPECIFIED:  DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3  WEIGHT 0.028 LB/FT  ASTM D1056 2A4	TITLE:  <h2 style="text-align: center;">SD-12420-T</h2>		SIZE <h1 style="text-align: center;">A</h1>	DWG. NO. UG-1-DU-250-TP-093	REV <h1 style="text-align: center;">A</h1>
REV.	DATE	REVIEWED BY	CHANGES MADE	DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(103018)	ASTM D2000 3BA711 A14 B13 C12 F17	DR. BY	C. VENT	DATE	11/21/2018	SHEET 1 OF 1