
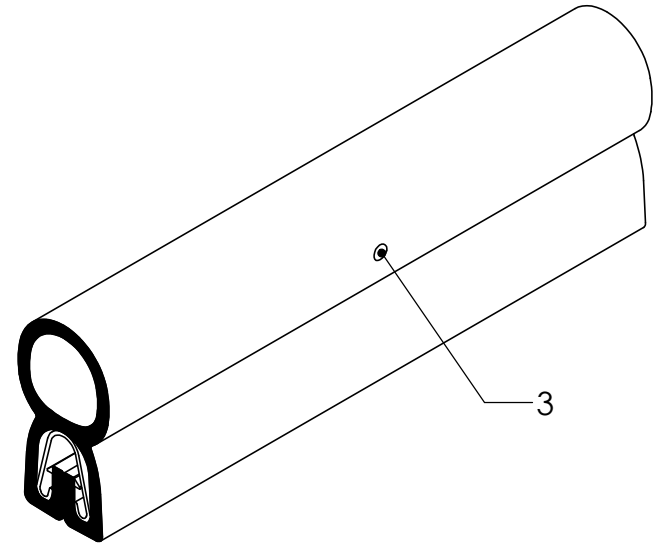


NOTES:

- 1) CLOSED CELL EPDM SPONGE RUBBER (DENSITY 0.696 G/CM<sup>3</sup>)
- 2) SD-487 SPRING STEEL CARRIER (0.030 LB/FT)
- 3) 0.125" VENT HOLE 6"-10" SPACING

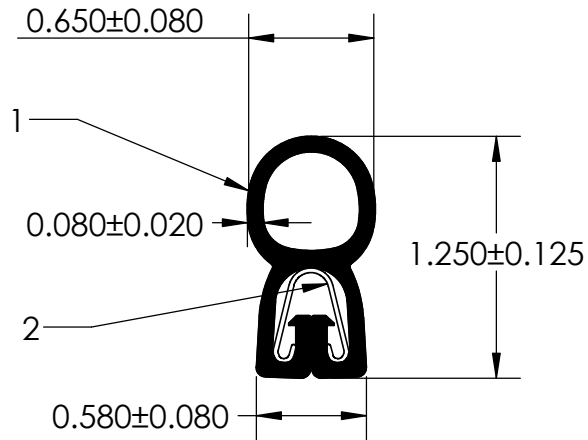

	<b>UNI-GRIP, INC.</b>	
	9823 STATE ROUTE 53 N UPPER SANDUSKY, OHIO 43351	

PROPRIETARY AND CONFIDENTIAL:  THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.  DOCUMENT CONTROL NUMBER <b>UG-1-EN-001-FR-(111416)</b>	UNLESS OTHERWISE SPECIFIED:  DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3  WEIGHT <b>0.131 LB/FT</b>  ASTM D1056 <b>2A4</b>  ASTM D2000 <b>N/A</b>	TITLE:  <div style="text-align: center; font-size: 1.5em;"><b>SD-168</b></div>		
		SIZE <div style="font-size: 2em; font-weight: bold; text-align: center;">A</div>	DWG. NO. <b>UG-1-BL-487-ST-003</b>	REV <div style="font-size: 2em; font-weight: bold; text-align: center;">A</div>
		DR. BY <b>C. VENT</b>	DATE <b>5/14/2018</b>	SHEET <b>1</b> OF <b>1</b>