
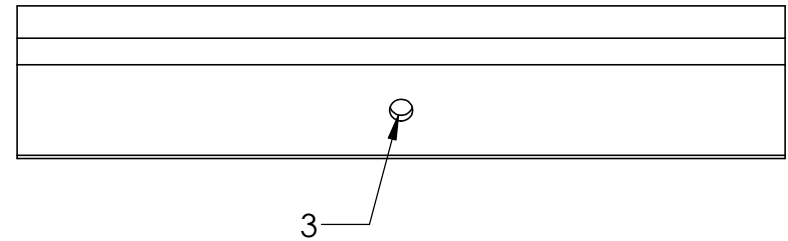
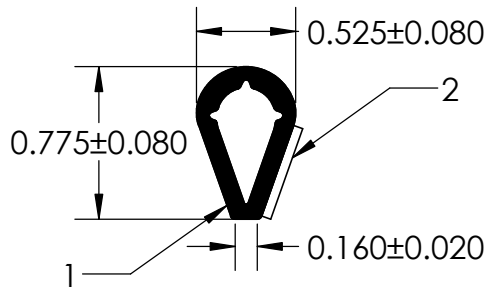


NOTES:

- 1) CLOSED CELL EPDM SPONGE RUBBER (0.750 G/CM<sup>3</sup>)
- 2) 1/2" 3M ST-1200 HEAT ACTIVATED TAPE (0.010 LB/FT)
- 3) DRAIN HOLES

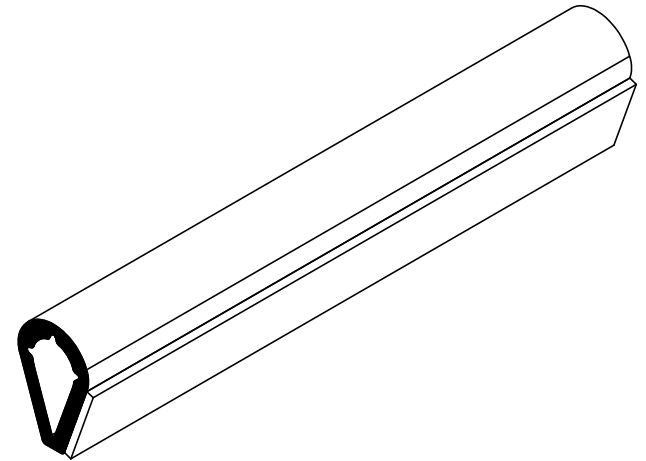

**UNI-GRIP, INC.**

9823 STATE ROUTE 53 N  
UPPER SANDUSKY, OHIO 43351

PROPRIETARY AND CONFIDENTIAL:  THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.		UNLESS OTHERWISE SPECIFIED:  DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3		TITLE:  <p style="text-align: center; font-size: 1.2em;">SD-202-T</p>		
DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(111416)		WEIGHT <p style="text-align: center; font-size: 1.1em;">0.064 LB/FT</p> ASTM D1056      2A4		SIZE <p style="font-size: 1.5em; font-weight: bold;">A</p>		DWG. NO. <p style="text-align: center; font-size: 1.1em;">UG-1-TS-500-TP-073</p>
ASTM D2000      N/A		DR. BY <p style="text-align: center; font-size: 1.1em;">C. VENT</p>		DATE <p style="text-align: center; font-size: 1.1em;">2/9/2018</p>		REV <p style="font-size: 1.5em; font-weight: bold;">A</p>
SCALE: 1:1				SHEET 1 OF 1		