
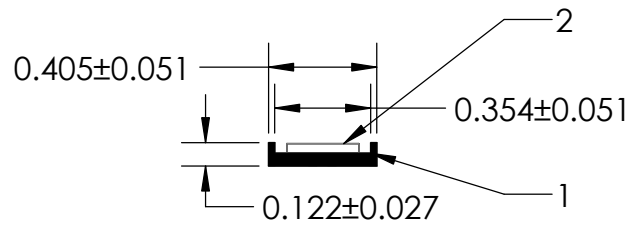


NOTES:

- 1) 70 DUROMETER DENSE NEOPRENE DENSE (1.200 G/CM³)
- 2) 3/8" 3M ST-1200 HEAT ACTIVATED TAPE (0.006 LB/FT)

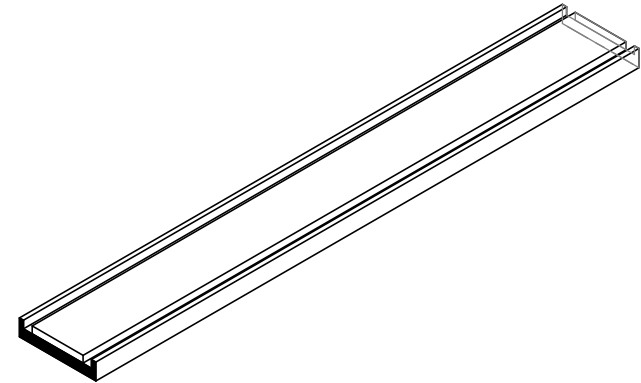

UNI-GRIP, INC.

9823 STATE ROUTE 53 N
UPPER SANDUSKY, OHIO 43351

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.	UNLESS OTHERWISE SPECIFIED:	TITLE:			
	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3	SD-249-T			
	WEIGHT 0.027 LB/FT ASTM D1056 N/A				
DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(111416)	ASTM D2000 3BA711 A14 B13 C12 F17	SIZE A	DWG. NO. UG-1-TS-375-TP-086	REV A	
P:\Engineering\Prints\Tape Seals\SD-249-T UG-1-TS-375-TP-086		SCALE: 1:1	DR. BY C. VENT	DATE 6/28/2018	SHEET 1 OF 1