

NOTES:

- 1) CLOSED CELL EPDM SPONGE RUBBER (0.750 G/CM³)
- 2) SD-487 SPRING STEEL CARRIER (0.030 LB/FT)



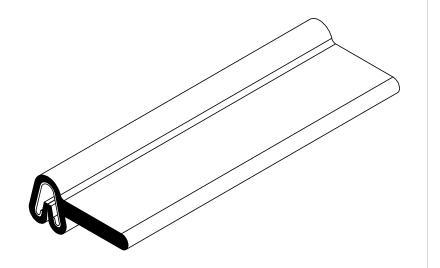

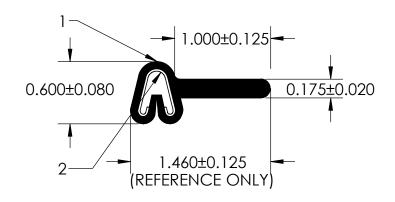

PROPRIETARY AND CONFIDENTIAL: UNLESS OTHERWISE SPECIFIED: TITLE: THE INFORMATION CONTAINED IN DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3 SD-499 THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP.INC. ANY REPRODUCTION IN PART OR AS A WEIGHT WHOLE WITHOUT THE WRITTEN 0.139 LB/FT PERMISSION OF UNI-GRIP, INC. IS ASTM D1056 PROHIBITED. SIZE DWG. NO. **REV** 2A4 UG-1-FL-487-ST-042 DOCUMENT CONTROL NUMBER ASTM D2000 N/A UG-1-EN-001-FR-(111416) P:\Engineering\Prints\Flap Seals\SD-499 UG-1-FL-487-ST-042 DR. BY C. VENT DATE 6/12/2018 SCALE: 1:1 SHEET 1 OF 1

3