
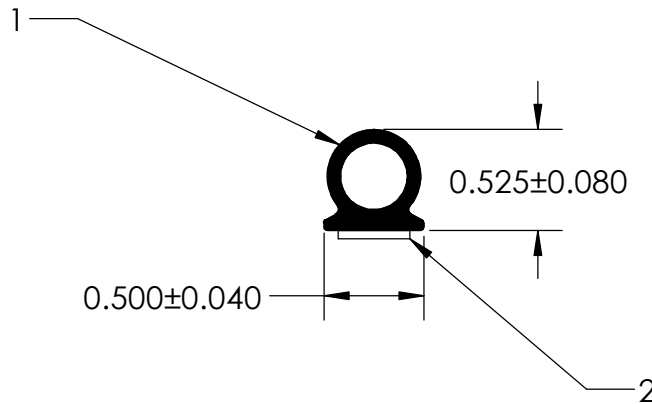


NOTES:

- 1) CLOSED CELL SPONGE RUBBER (DENSITY 0.544 G/CM³)
- 2) 3/8" 3M ST-1200 HEAT ACTIVATED TAPE (0.006 LB/FT)

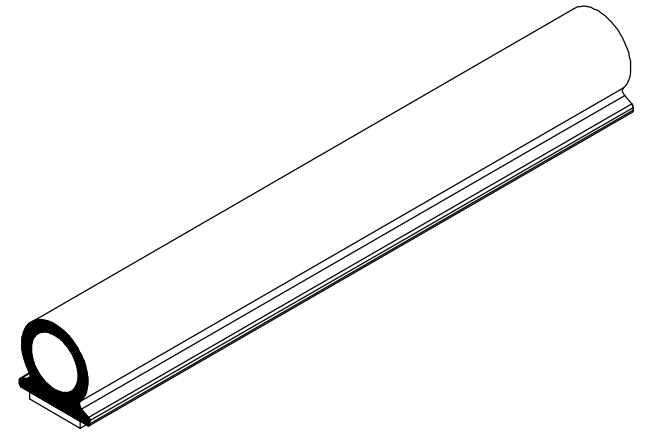

UNI-GRIP, INC.

9823 STATE ROUTE 53 N
UPPER SANDUSKY, OHIO 43351

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3		TITLE: <p style="text-align: center; font-size: 1.2em;">SD-501-T</p>		
DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(111416)		WEIGHT <p style="text-align: center; font-size: 1.2em;">0.036 LB/FT</p>		DWG. NO. <p style="text-align: center; font-size: 1.2em;">UG-1-TS-375-TP-013</p>		
ASTM D1056 <p style="text-align: center; font-size: 1.2em;">2A3</p>		ASTM D2000 <p style="text-align: center; font-size: 1.2em;">N/A</p>		SIZE <p style="text-align: center; font-size: 2em; font-weight: bold;">A</p>	DATE <p style="text-align: center;">1/4/2017</p>	REV <p style="text-align: center; font-size: 2em; font-weight: bold;">A</p>
P:\Engineering\Prints\Tape Seals\SD-501-T UG-1-TS-375-TP-013				SCALE: <p style="text-align: center;">1:1</p>	DR. BY <p style="text-align: center;">L. CLARK</p>	SHEET 1 OF 1