
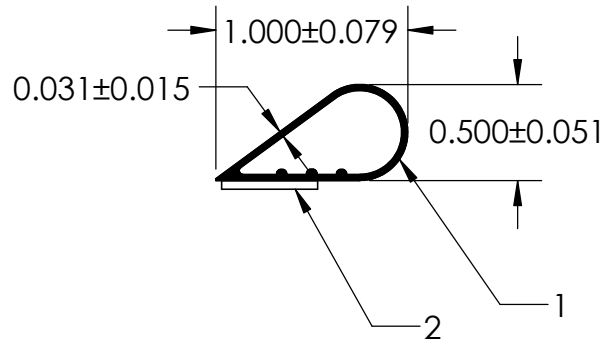


NOTES:

- 1) 70 DUROMETER EPDM DENSE RUBBER (1.200 G/CM³)
- 2) 1/2" 3M ST-1200 HEAT ACTIVATED TAPE (0.010 LB/FT)

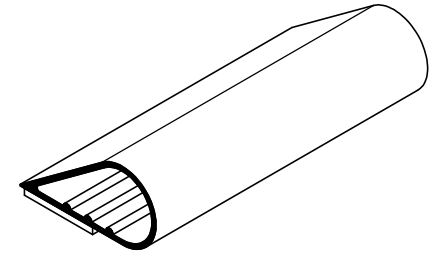

UNI-GRIP, INC.

9823 STATE ROUTE 53 N
UPPER SANDUSKY, OHIO 43351

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3	TITLE: <p style="text-align: center; font-size: 1.5em;">TS-051</p>		
	WEIGHT <p style="text-align: center;">0.051 LB/FT</p>	DWG. NO. <p style="text-align: center;">UG-1-TS-500-TP-051</p>		
	DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(111416)	ASTM D1056 <p style="text-align: center;">N/A</p>	SIZE <p style="text-align: center; font-size: 1.5em;">A</p>	REV <p style="text-align: center; font-size: 1.5em;">A</p>
ASTM D2000 3BA711 A14 B13 C12 F17		DR. BY L. CLARK	DATE 12/4/2017	SHEET 1 OF 1