
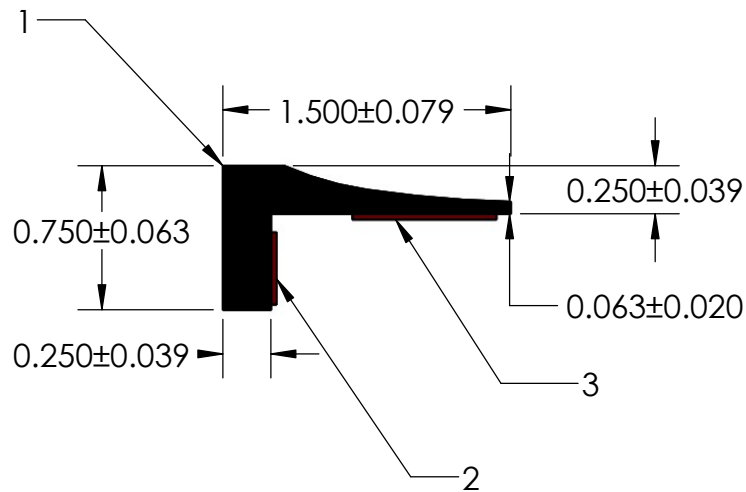


NOTES:

- 1) 60 DUROMETER NEOPRENE (1.355 G/CM³)
- 2) 3/8" ST-1200 3M HEAT ACTIVATED TAPE (0.006 LB/FT)
- 3) 3/4" ST-1200 3M HEAT ACTIVATED TAPE (0.013 LB/FT)

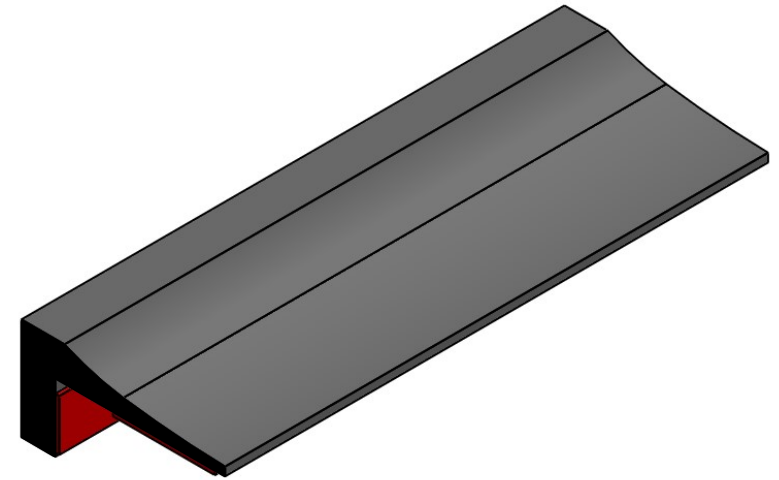

UNI-GRIP, INC.

9823 STATE ROUTE 53 N
UPPER SANDUSKY, OHIO 43351

REVISION BLOCK				PROPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:	TITLE:				
REV.	DATE	REVIEWED BY	CHANGES MADE	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3	TS-116				
A									WEIGHT	0.213 LB/FT
B					ASTM D1056	N/A <th>SIZE</th> <th>DWG. NO.</th> <th>REV</th>	SIZE	DWG. NO.	REV	
C					DOCUMENT CONTROL NUMBER	UG-1-EN-001-FR-(103018) <th>A</th> <td>UG-1-TS-750-TP-116 <th>A</th> </td>	A	UG-1-TS-750-TP-116 <th>A</th>	A	
D					ASTM D2000	N/A <td>DR. BY</td> <td>C. VENT</td> <td>DATE</td> <td>3/6/2019</td> <td>SHEET 1 OF 1</td>	DR. BY	C. VENT	DATE	3/6/2019
E						SCALE:	1:1			

P:\Engineering\Prints\Tape Seals\TS-116 UG-1-TS-750-TP-116