
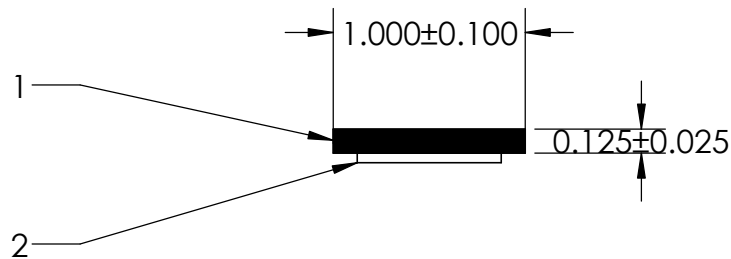


NOTES:

- 1) CLOSED CELL EPDM SPONGE RUBBER (0.750 G/CM³)
- 2) 3/4" ST-1200 3M HEAT ACTIVATED TAPE (0.013 LB/FT)

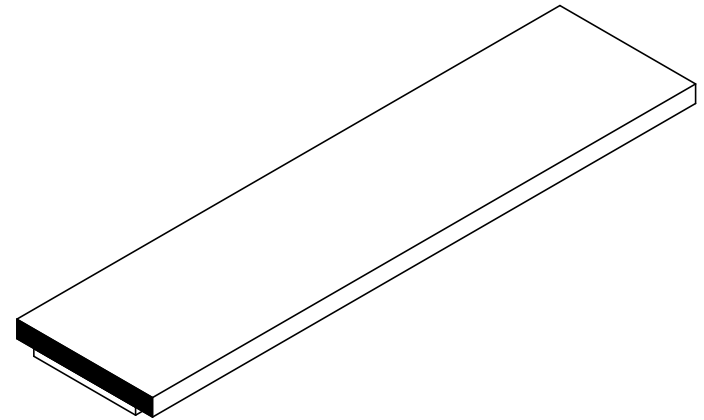

UNI-GRIP, INC.

9823 STATE ROUTE 53 N
UPPER SANDUSKY, OHIO 43351

| REVISION BLOCK | | | | PROPRIETARY AND CONFIDENTIAL: | UNLESS OTHERWISE SPECIFIED: | TITLE: | | | |
|--|------|-------------|--------------|---|---|-------------|-----------|--------------------|----------|
| REV. | DATE | REVIEWED BY | CHANGES MADE | THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED. | DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3 | TS-131 | | | |
| A | | | | | | | | | |
| B | | | | | WEIGHT | 0.174 LB/FT | | | |
| C | | | | | ASTM D1056 | 2A4 | SIZE | DWG. NO. | REV |
| D | | | | | DOCUMENT CONTROL NUMBER | ASTM D2000 | A | UG-1-TS-750-TP-131 | A |
| E | | | | UG-1-EN-001-FR-(103018) | N/A | DR. BY | C. VENT | DATE | |
| P:\Engineering\Prints\Tape Seals\TS-131 UG-1-TS-750-TP-131 | | | | SCALE: | 1:1 | DATE | 1/14/2020 | SHEET 1 OF 1 | |