
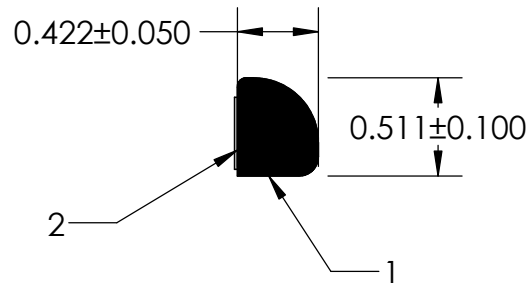


NOTES:

- 1) CLOSED CELL EPDM GRAY SPONGE RUBBER (0.250 G/CM³)
- 2) 3/8" PRESSURE SENSITIVE TAPE (0.002 LB/FT)

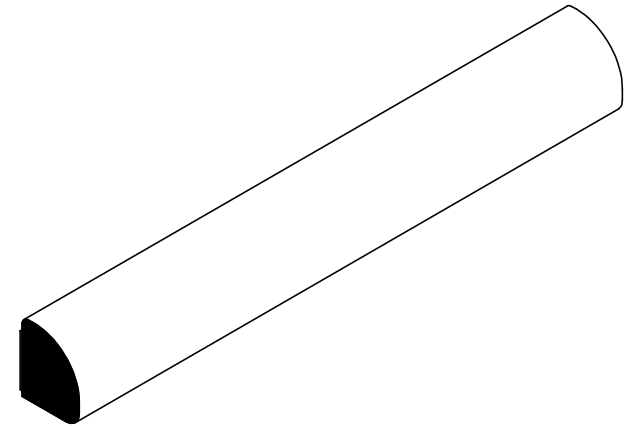

UNI-GRIP, INC.

9823 STATE ROUTE 53 N
UPPER SANDUSKY, OHIO 43351

REVISION BLOCK				PROPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:	TITLE:				
REV.	DATE	R. By	CHANGES MADE	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3	TS-168				
A										
B					WEIGHT	0.023 LB/FT				
C					ASTM D1056	2A2				
D					ASTM D2000	N/A				
E				DOCUMENT CONTROL NUMBER	UG-1-EN-001-FR-(080918)					
P:\Engineering\Prints\Master Prints\Tape Seals\TS-168 UG-1-TS-375-PT-168				SCALE:	1:1	DR. BY	C. VENT	DATE	10/6/2020	SHEET 1 OF 1