
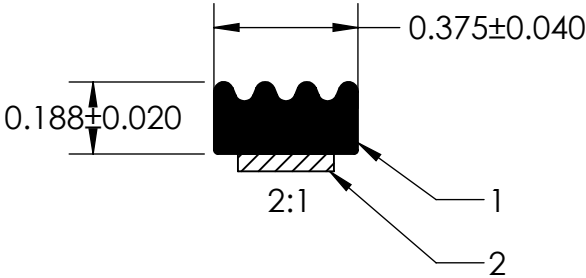


NOTES:

- 1) CLOSED CELL EPDM SPONGE RUBBER (0.450 G/CM³)
- 2) 1/4" ST-1200 3M HEAT ACTIVATED TAPE (0.010 LB/FT)

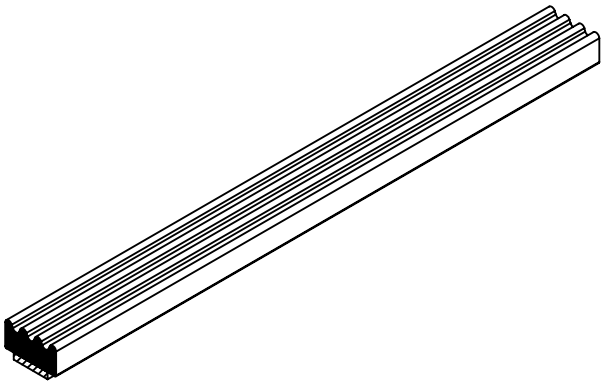

UNI-GRIP, INC.

9823 STATE ROUTE 53 N
UPPER SANDUSKY, OHIO 43351

REVISION BLOCK				PROPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:	TITLE:					
REV.	DATE	By	CHANGES MADE	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP,INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP,INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES		TS-239				
A					WEIGHT 0.017 LB/FT						
B					ASTM D1056 2A4		SIZE A	DWG. NO. UG-1-TS-250-TP-239	REV		
C					ASTM D2000 N/A						
D				DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(030123)							
E											
P:\Engineering\Prints\Master Prints\Tape Seals\TS-239 UG-1-TS-250-TP-239					SCALE:	1:1	DR. BY	C. VENT	DATE	1/23/2025	SHEET 1 OF 1