
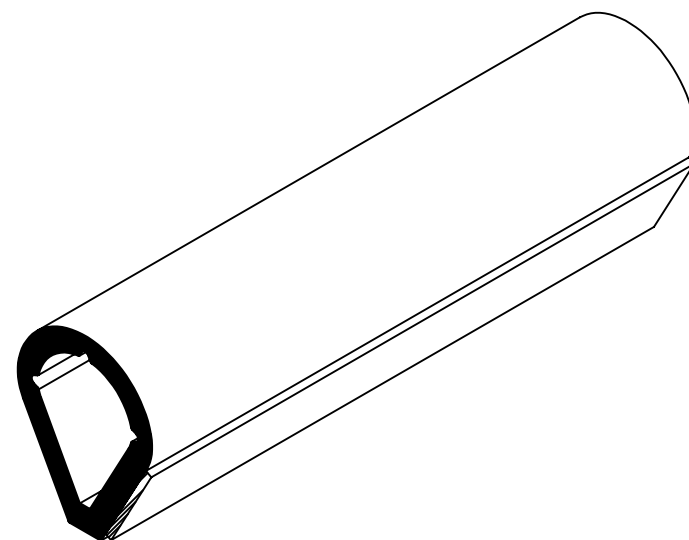


NOTES:

- 1) CLOSED CELL EPDM SPONGE RUBBER (0.550 G/CM³)
- 2) 5/8" ST-1200 3M HEAT ACTIVATED TAPE (0.013 LB/FT)

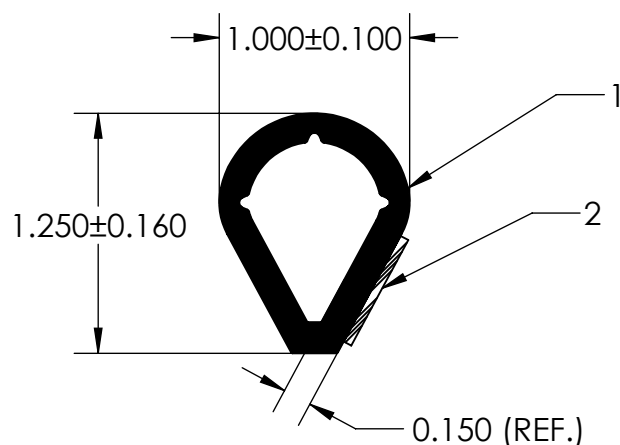

UNI-GRIP, INC.

9823 STATE ROUTE 53 N
UPPER SANDUSKY, OHIO 43351

REVISION BLOCK				PROPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:	TITLE:					
REV.	DATE	By	CHANGES MADE	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP,INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP,INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES	TS-238					
A					WEIGHT						
B					0.123 LB/FT						
C					ASTM D1056	2A5	SIZE	DWG. NO.	REV		
D				DOCUMENT CONTROL NUMBER	ASTM D2000	A	UG-1-TS-625-TP-238				
E				UG-1-EN-001-FR-(030123)	N/A						
P:\Engineering\Prints\Master Prints\Tape Seals\TS-238 UG-1-TS-625-TP-238					SCALE:	1:1	DR. BY	C. VENT	DATE	1/20/2025	SHEET 1 OF 1

5

4

3

2

1