



NOTES:

1) 85 DUROMETER CLEAR PVC (1.370 G/CM³)

2) 12mm 3M EX4011 TAPE (0.008 LB/FT)

3) 1.900" MYLAR (0.007 LB/FT)

4) TOP COAT

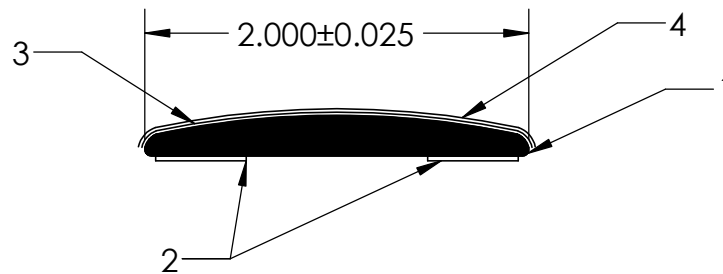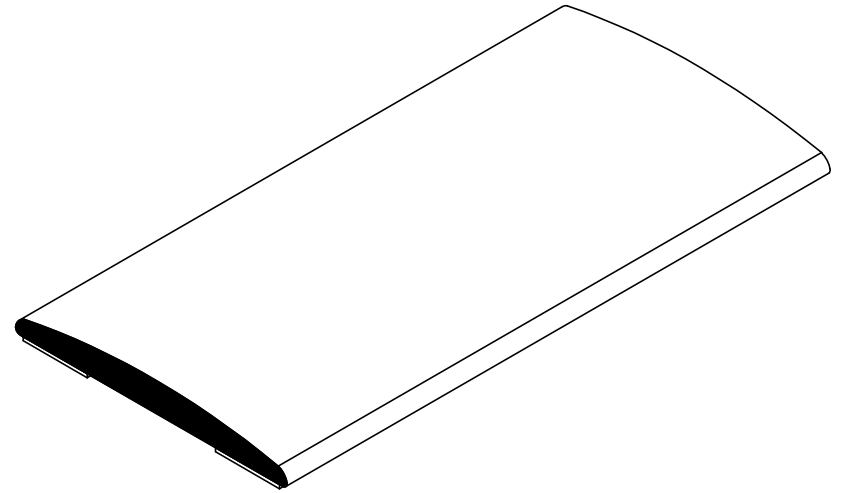

UNI-GRIP, INC.

9823 STATE ROUTE 53 N
UPPER SANDUSKY, OHIO 43351

REVISION BLOCK				PROPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:	TITLE:						
REV.	DATE	By	CHANGES MADE	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP,INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP,INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES		99GT01-48EX					
A					WEIGHT							
B					0.239 LB/FT							
C					ASTM D1056	N/A		SIZE A	DWG. NO. UG-1-TG-12mm-TP-023	REV		
D				DOCUMENT CONTROL NUMBER		ASTM D2000						
E				UG-1-EN-001-FR-(030123)		N/A						
P:\Engineering\Prints\Master Prints\Trim-Gard\99GT01-48EX UG-1-TG-12mm-TP-023					SCALE:	1:1		DR. BY	C. VENT	DATE	3/13/2024	SHEET 1 OF 1

5

4

3

2

1