
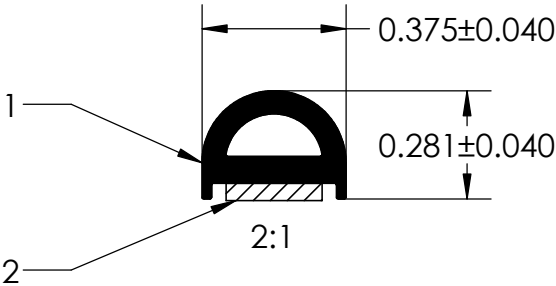


NOTES:

- 1) CLOSED CELL EPDM SPONGE RUBBER (0.450 G/CM³)
- 2) 1/4" ST-1200 3M HEAT ACTIVATED TAPE (0.004 LB/FT)

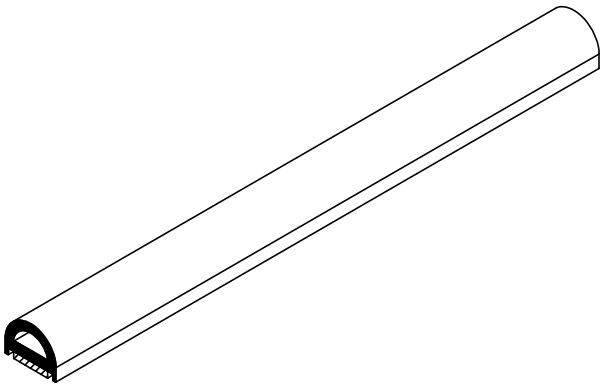

UNI-GRIP, INC.

9823 STATE ROUTE 53 N
UPPER SANDUSKY, OHIO 43351

REVISION BLOCK				PROPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:	TITLE:		
REV.	DATE	By	CHANGES MADE	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES	TS-240		
A					WEIGHT			
B					0.015 LB/FT			
C				DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(030123)	ASTM D1056	SIZE	DWG. NO.	REV
D					2A4	A	UG-1-TS-250-TP-240	
E					N/A			
P:\Engineering\Prints\Master Prints\Tape Seals\TS-240 UG-1-TS-250-TP-240				SCALE: 1:1		DR. BY C. VENT	DATE 1/23/2025	SHEET 1 OF 1