
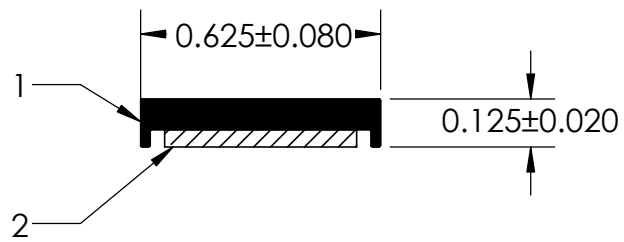


NOTES:

- 1) CLOSED CELL EPDM SPONGE RUBBER (0.0450 G/CM³)
- 2) 1/2" ST-1200 3M HEAT ACTIVATED TAPE (0.010 LB/FT)

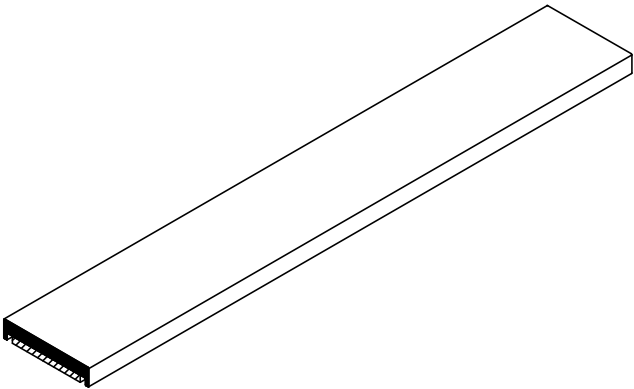

UNI-GRIP, INC.
9823 STATE ROUTE 53 N
UPPER SANDUSKY, OHIO 43351

REVISION BLOCK				PROPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:	TITLE:			
REV.	DATE	By	CHANGES MADE	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP,INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP,INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES		TS-241		
A					WEIGHT				
B					0.021 LB/FT				
C					ASTM D1056				
D				DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(030123)	2A4		SIZE	DWG. NO.	REV
E					ASTM D2000		A	UG-1-TS-500-TP-241	
P:\Engineering\Prints\Master Prints\Tape Seals\TS-241 UG-1-TS-500-TP-241					SCALE: 1:1				