

NOTES:

- 1) CLOSED CELL EPDM SPONGE RUBBER (0.536 G/CM³)
- 2) SD-487 SPRING STEEL CARRIER (0.030 LB/FT)



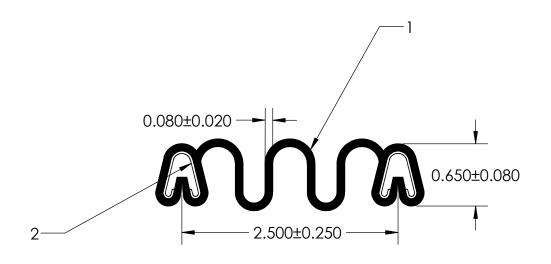

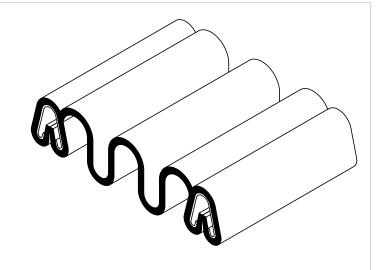

UNI-GRIP, INC.

9823 STATE ROUTE 53 N UPPER SANDUSKY, OHIO 43351

| PROPRIETARY AND CON | PROPRIETARY AND CONFIDENTIAL: | | UNLESS OTHERWISE SPECIFIED: | | | | | |
|--|-------------------------------|---|-----------------------------|-----------|--------------------|----------------|-------|--------|
| THE INFORMATION CON' THIS DRAWING IS THE SO PROPERTY OF UNI-GRIP,I | DLE | DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3 | | | ED-5381 | | | |
| REPRODUCTION IN PART WHOLE WITHOUT THE WR PERMISSION OF UNI-GRIF | RITTEN P,INC. IS | 0.205 LB/FT | | | | | | |
| PROHIBITED. | | ASTM D1056 | 2A2 | SIZE | DWG. N | | | REV |
| DOCUMENT CONTROL NUMUG-1-EN-001-FR- | | ASTM D2000 | N/A | A | UG-1-AC-487-ST-00. | | A | |
| P:\Engineering\Prints\Accordian Seals\ED-5381 UG-1-AC-487-ST-0 | 005 | SCALE: | 1:1 | DR. BY L. | CLARK | DATE 2/13/2017 | SHEET | 1 OF 1 |