
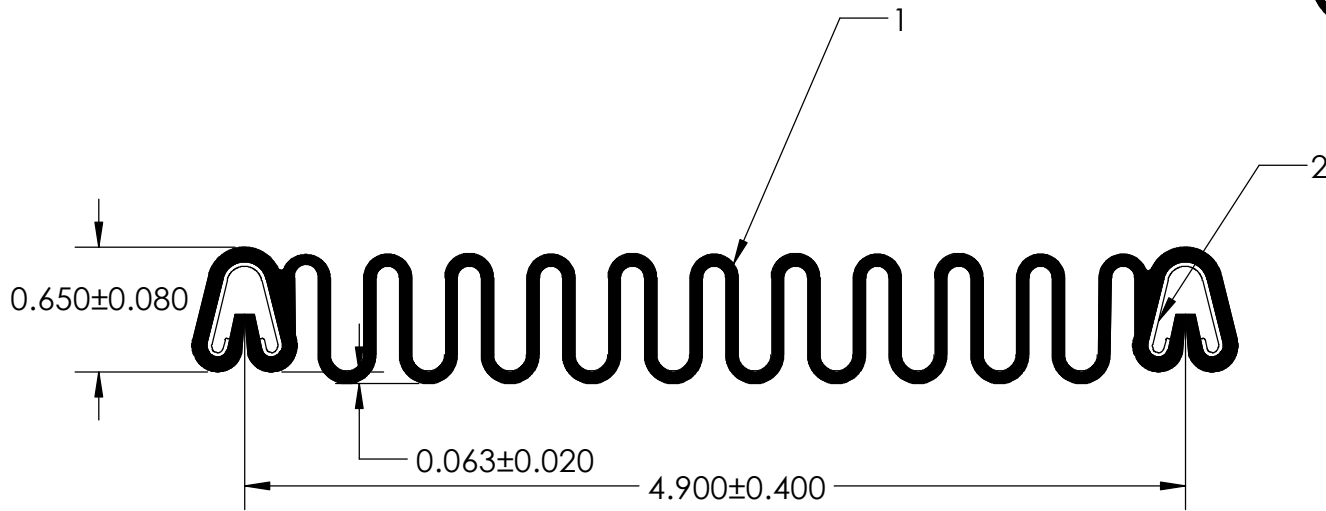


NOTES:

- 1) CLOSED CELL SPONGE RUBBER (DENSITY 0.699 G/CM<sup>3</sup>)
- 2) SD-487 SPRING STEEL (0.030 LB/FT)

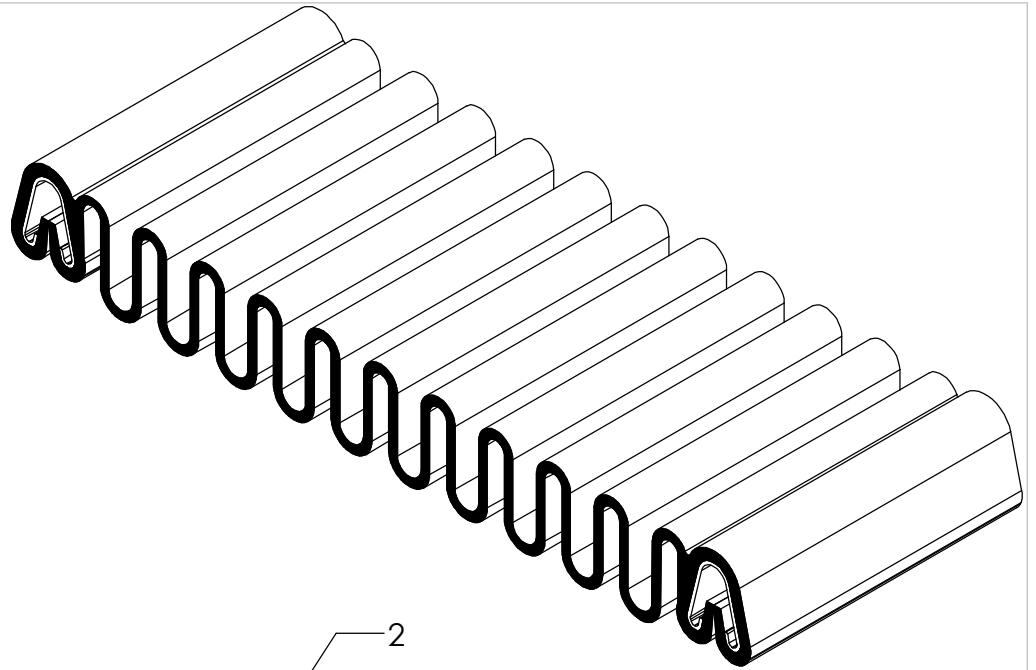

**UNI-GRIP, INC.**

9823 STATE ROUTE 53 N  
UPPER SANDUSKY, OHIO 43351

PROPRIETARY AND CONFIDENTIAL:  THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.	UNLESS OTHERWISE SPECIFIED:  DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3	TITLE:  ED-5389	
	WEIGHT 0.441 LB/FT	SIZE <b>A</b>	DWG. NO. UG-1-AC-487-ST-004
	DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(111416)	ASTM D1056 2A3	REV <b>A</b>
SCALE: 1:1		DR. BY L. CLARK	DATE 1/5/2017