
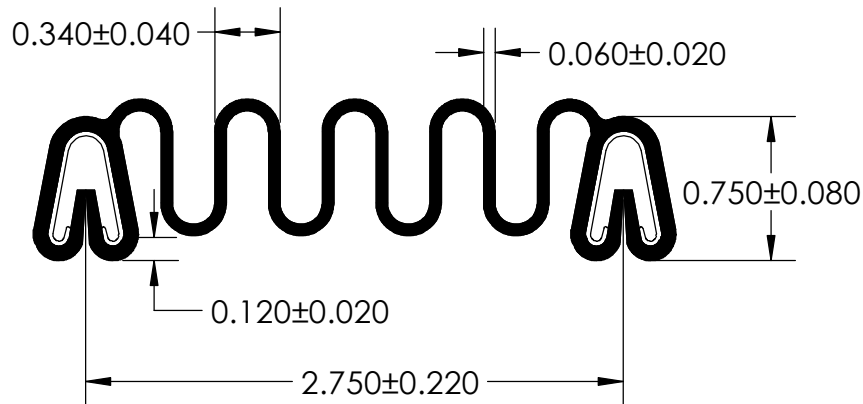


NOTES:

- 1) CLOSED CELL SPONGE (DENSITY 0.853 G/CM³)
- 2) SD-500L SPRING STEEL (0.035 LB/FT)

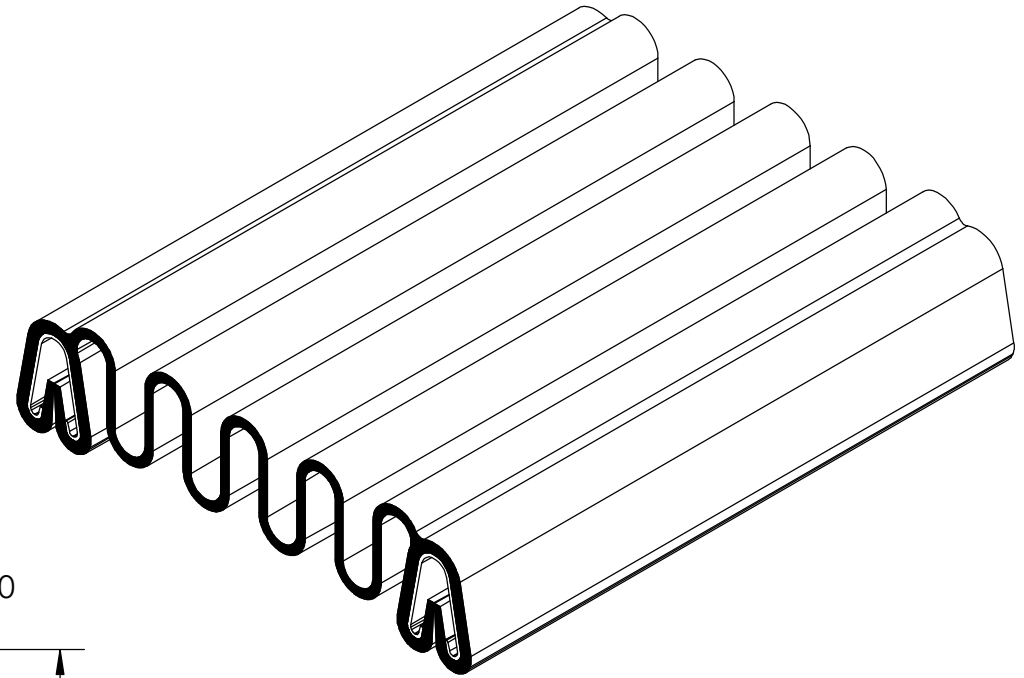

UNI-GRIP, INC.

9823 STATE ROUTE 53 N
UPPER SANDUSKY, OHIO 43351

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3	TITLE: <p style="text-align: center; font-size: 1.2em;">ED-5390</p>		
	WEIGHT <p style="text-align: center; font-size: 1.2em;">0.349 LB/FT</p>	SIZE <p style="text-align: center; font-size: 1.5em;">A</p>	DWG. NO. <p style="text-align: center; font-size: 1.2em;">UG-1-AC-500-ST-001</p>	REV <p style="text-align: center; font-size: 1.5em;">A</p>
	DOCUMENT CONTROL NUMBER <p style="text-align: center; font-size: 1.2em;">UG-1-EN-001-FR-(111416)</p>	ASTM D1056 <p style="text-align: center; font-size: 1.2em;">2A5</p>		
	ASTM D2000 <p style="text-align: center; font-size: 1.2em;">N/A</p>	DR. BY <p style="text-align: center; font-size: 1.2em;">L. CLARK</p>	DATE <p style="text-align: center; font-size: 1.2em;">11/14/16</p>	SHEET 1 OF 1