

1) CLOSED CELL EPDM SPONGE RUBBER (0.250 G/CM³)

2) USED FOR CP-006



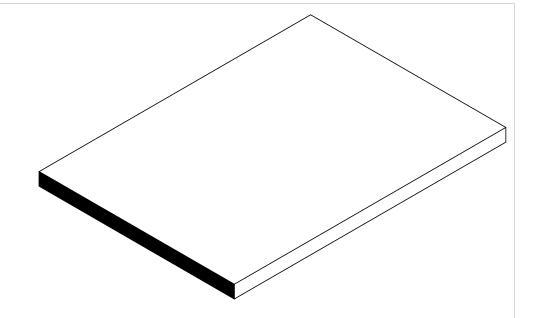

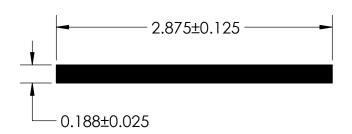

PROPRIETARY	AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:	TITLE:				
THIS DRAWIN	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP,INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP,INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3		RE-002			
WHOLE WITH		0.059 LB/FT					
		ASTM D1056 2A2	SIZE DWG	DWG. NO.		REV	
DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(1114)		ASTM D2000 N/A			UG-1-RE-002	A	
P:\Engineering\Prints\Rubber Extrusions\RE-002 UG-1-RE-002		SCALE: 1:1	DR. BY L.	CLARK	DATE 4/6/2017	SHEET 1 OF 1	

5 4