

NOTES:

- 1) 60 DUROMETER SILICONE (1.370 G/CM³)
- 2) 487 SPRING STEEL CARRIER (0.030 LB/FT)

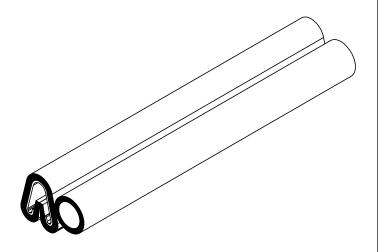



(4)	UNI-GRIP, INC.
	9823 STATE ROUTE 53 N UPPER SANDUSKY, OHIO 43351
	011 EK 3/AND03K1, OTIIO 40001

	PROPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:	TITLE:		
	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3		SD-106-G	
		0.160			
		ASTM D1056 N/A	SIZE	DWG. NO.	EV
	DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(111416)	ASTM D2000 N/A	Α	UG-1-BL-487-ST-036	4
P:\Engineering\Prints\Bulb Seals\SD-106-G UG-1-BL-487-ST-036		SCALE: 1:1	DR. BY C	. VENT DATE 10/18/2017 SHEET 1 C)F 1

3

5 4

2

.