
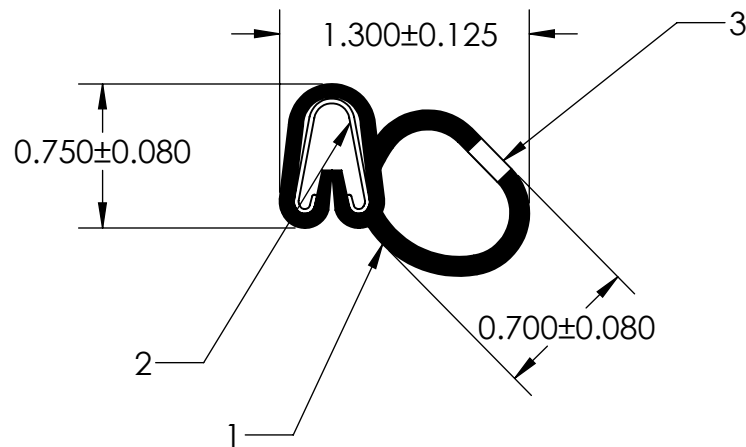


NOTES:

- 1) CLOSED CELL EPDM SPONGE RUBBER (0.750<sup>3</sup>)
- 2) SD-500L SPRING STEEL (0.035 LB/FT)
- 3) .125" VENT HOLE

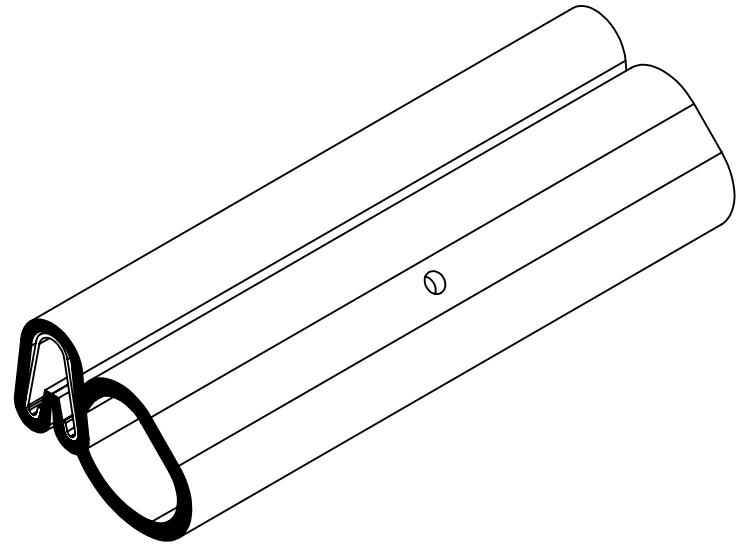

**UNI-GRIP, INC.**

9823 STATE ROUTE 53 N  
UPPER SANDUSKY, OHIO 43351

REVISION BLOCK				PROPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:	TITLE:		
REV.	DATE	R. By	CHANGES MADE	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3	SD-109 W 500L		
A								
B					WEIGHT	0.141 LB/FT		
C					ASTM D1056	2A4		
D					DOCUMENT CONTROL NUMBER	ASTM D2000	N/A	
E				UG-1-EN-001-FR-(080918)	SCALE: 1:1			
P:\Engineering\Prints\Master Prints\Bulb Seals\SD-109 W 500L UG-1-BL-500-ST-101				DR. BY C. VENT		DATE	3/15/2021	SHEET 1 OF 1