
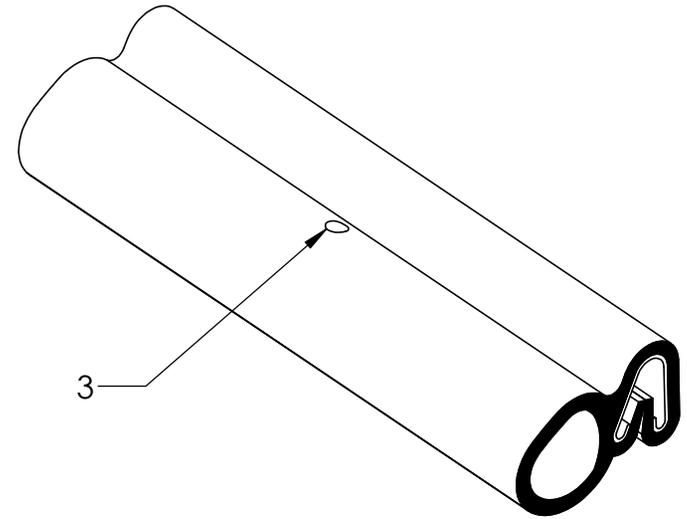


NOTES:

- 1) CLOSED CELL EPDM SPONGE RUBBER (DENSITY 0.740 G/CM<sup>3</sup>)
- 2) SD-487 SPRING STEEL CARRIER (0.030 LB/FT)
- 3) 0.125" VENT HOLE 6"-10" SPACING

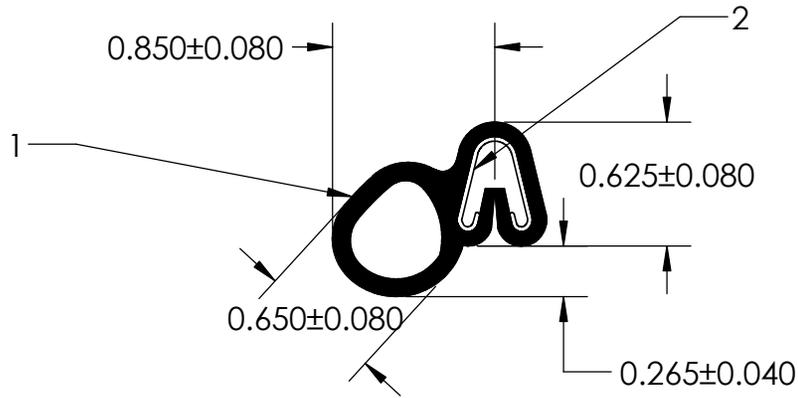

**UNI-GRIP, INC.**

9823 STATE ROUTE 53 N  
UPPER SANDUSKY, OHIO 43351

PROPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3
	WEIGHT <b>0.131 LB/FT</b>
	ASTM D1056 <b>2A2</b>
DOCUMENT CONTROL NUMBER <b>UG-1-EN-001-FR-(111416)</b>	ASTM D2000 <b>N/A</b>

TITLE: <b>SD-109</b>		
SIZE <b>A</b>	DWG. NO. <b>UG-1-BL-487-ST-002</b>	REV <b>A</b>