
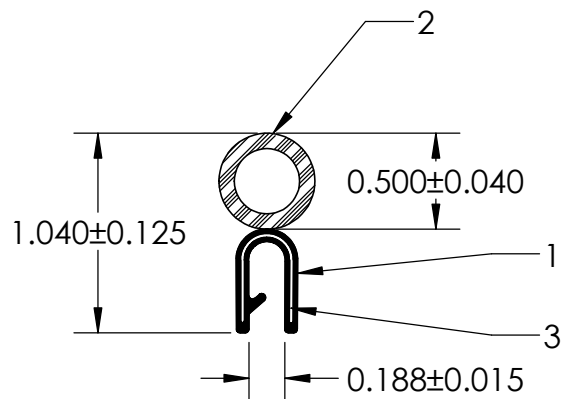


NOTES:

- 1) 80 DUROMETER BLACK PVC (1.370 G/CM³)
- 2) CLOSED CELL EPDM SPONGE RUBBER (0.380 G/CM³)
- 3) 1" STAMPED ALUMINUM CARRIER (0.035 LB/FT)
- 4) CYANOACRYLATE BOND

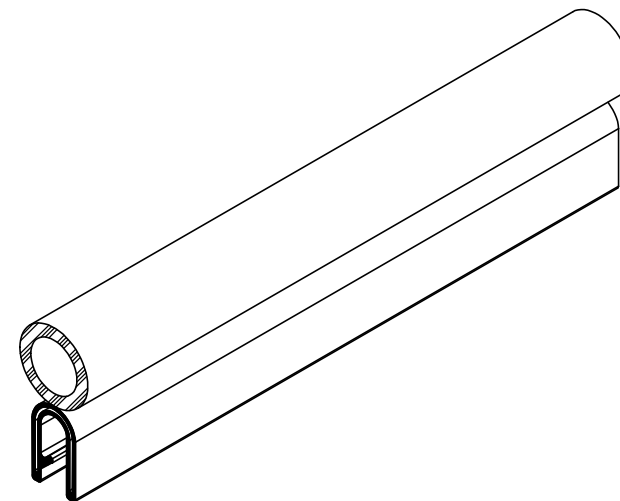

UNI-GRIP, INC.

9823 STATE ROUTE 53 N
UPPER SANDUSKY, OHIO 43351

REVISION BLOCK			
REV.	DATE	R. By	CHANGES MADE
A			
B			
C			
D			
E			

PROPRIETARY AND CONFIDENTIAL:

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.

DOCUMENT CONTROL NUMBER
UG-1-EN-001-FR-(080918)

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES PER ARPM CLASS 3

WEIGHT
0.099 LB/FT

ASTM D1056
2A4

ASTM D2000
N/A

TITLE:

SD-110-T-AL-.1875 IN OPENING

SIZE
A

DWG. NO.
UG-1-GL-1000-AL-047

REV