

## NOTES:

- 1) 60 DUROMETER SILICONE HEAT RESISTANT (1.370 G/CM<sup>3</sup>)
- 2) 1.120" WIRE CARRIER (0.024 LB/FT)



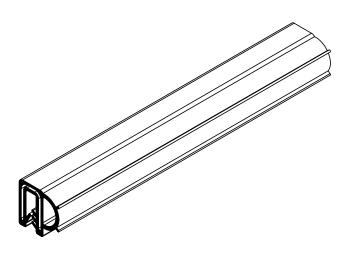



## UNI-GRIP, INC.

9823 STATE ROUTE 53 N UPPER SANDUSKY, OHIO 43351

REVISION BLOCK				PROPRIETARY AND CONFIDENTIAL:	ENTIAL: UNLESS OTHERWISE SPECIFIED:		TITLE:				
REV.	DATE	DATE APPROVED BY CHANG		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3			SD-12153-G			
Α				PROPERTY OF UNI-GRIP, INC. ANY				3D-12133-G			
В				REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC., IS	0.125 LB/FT						
С				PROHIBITED.	ASTM D1056	N/A	SIZE	DWG.	G. NO.		REV
D				DOCUMENT CONTROL NUMBER	ASTM D2000 N/A		Α	UG-1-DU-1120-WR-086			Α
E				UG-1-EN-001-FR-(111416)		14//1					-
P:\En	gineering	\Prints\Dual	B-G UG-1-DU-1120-WR-086	SCALE:	1:1	DR. BY C	. VENT	DATE 9/24/2018 S	HEET 1	OF 1	

5

4

3

2

1