
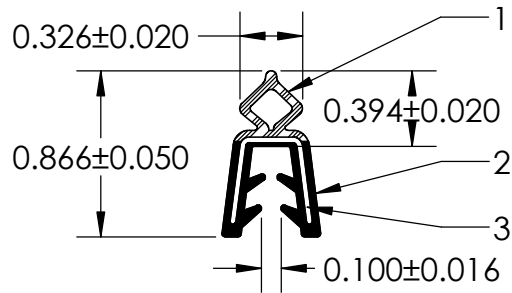


NOTES:

- 1) CLOSED CELL EPDM SPONGE RUBBER (0.865 G/CM<sup>3</sup>)
- 2) 70 DUROMETER EPDM DENSE RUBBER (1.200 G/CM<sup>3</sup>)
- 3) 1.120" WIRE CARRIER (0.024 LB/FT)

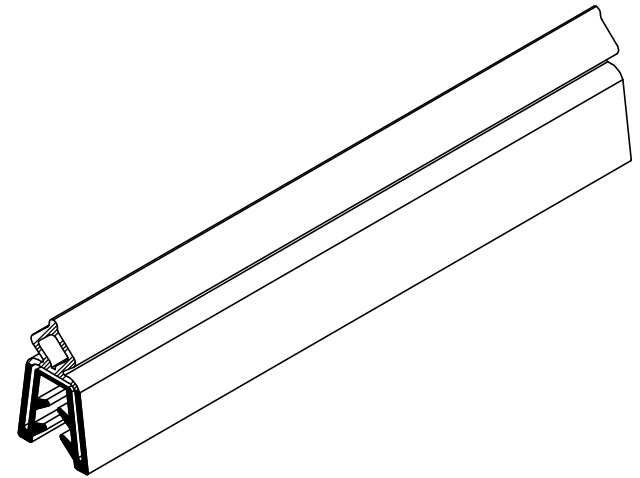

**UNI-GRIP, INC.**

9823 STATE ROUTE 53 N  
UPPER SANDUSKY, OHIO 43351

REVISION BLOCK				PROPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:	TITLE:				
REV.	DATE	APPROVED BY	CHANGES MADE	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3	SD-12164				
A										
B										
C										
D										
E				WEIGHT	0.109 LB/FT	SIZE	DWG. NO.	REV		
DOCUMENT CONTROL NUMBER				ASTM D1056	2A4	<b>A</b>	UG-1-DU-1120-WR-088	<b>A</b>		
UG-1-EN-001-FR-(111416)				ASTM D2000	3BA711 A14 B13 C12 F17					
P:\Engineering\Prints\Dual Durometer\SD-12164 UG-1-DU-1120-WR-088				SCALE:	1:1	DR. BY	C. VENT	DATE	9/28/2018	SHEET 1 OF 1