
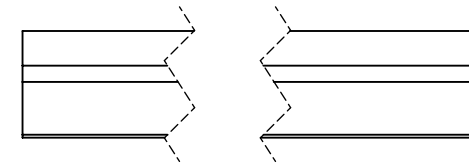
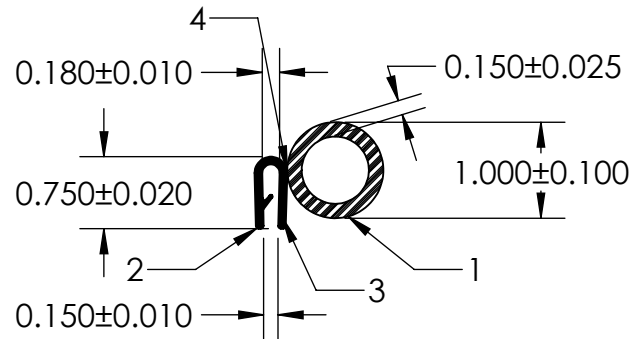


NOTES:

- 1) CLOSED CELL EPDM SPONGE RUBBER (0.300 G/CM³)
- 2) 80 DUROMETER BLACK PVC (1.370 G/CM³)
- 3) 1.413" STAMPED ALUMINUM (0.035 LB/FT)
- 4) CYANOACRYLATE ADHESIVE

CUT LENGHT	TOLERANCES
87.6"	+/- 0.40"
28.248"	+/- 0.20"
71.196"	+/- 0.40"
24.996"	+/- 0.20"
30.132"	+/-0.20"

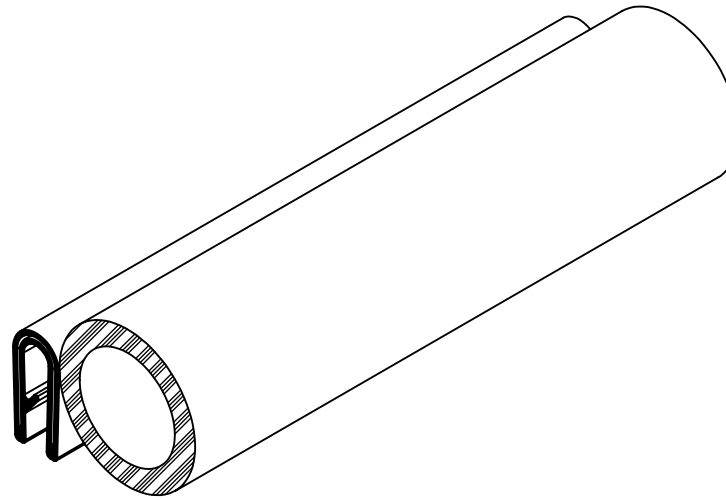

UNI-GRIP, INC.

9823 STATE ROUTE 53 N
UPPER SANDUSKY, OHIO 43351

REVISION BLOCK				PROPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:	TITLE:		
REV.	DATE	REVIEWED BY	CHANGES MADE	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP,INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP,INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3	SD-1400-AL w/ 1" BULB		
A	1/14/21	A.K.	MOVE THE BULB HIGHER PER THE CUSTOMER		WEIGHT 0.096 LB/FT			
B					ASTM D1056 2A4	SIZE A	DWG. NO. UG-1-GL-1430-AL-031	REV A
C					DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(103018)			
D								
E								
P:\Engineering\Prints\Glue Line\SD-1400-AL W/ 1" BULB UG-1-GL-1430-AL-031					SCALE: 1:1	DR. BY C. VENT	DATE 4/2/2019	SHEET 1 OF 1