

## NOTES:

- 1) 60 DUROMETER SILICONE (1.370G/CM)
- 2) SD-500-L STEEL CARRIER (0.035 LB/FT)



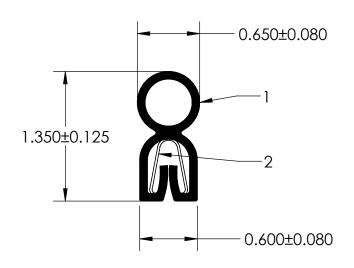



UNI-GRIP, INC.

9823 STATE ROUTE 53 N UPPER SANDUSKY, OHIO 43351

	PROPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPEC	IFIED:	TITLE:		
THIS DRAWING IS THE SC	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP,INC. ANY	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3			SD-168-G	
	REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP.INC. IS	weight 0.239				
	PROHIBITED.	ASTM D1056 N/A		SIZE	DWG. NO. UG-1-BL-500-ST-038	REV
DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(1114	DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(111416)	ASTM D2000 N/A				A
P:\Engineering\Prints\ Bulb Seals\ SD-168-G UG-	1-BL-500-ST-038	SCALE: 1:1		DR. BY C	. VENT DATE 10/27/2017	SHEET 1 OF 1

5

3

2