
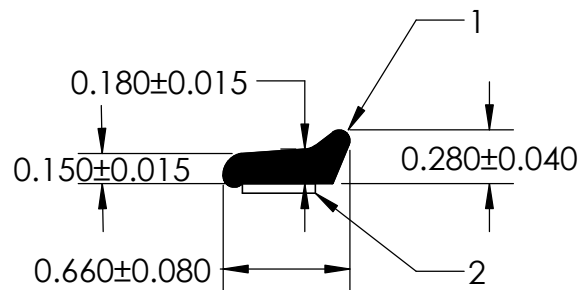


NOTES:

- 1) CLOSED CELL EPDM SPONGE (0.750 G/CM³)
- 2) 3/8" ST-1200 3M HEAT ACTIVATED (0.006 LB/FT)

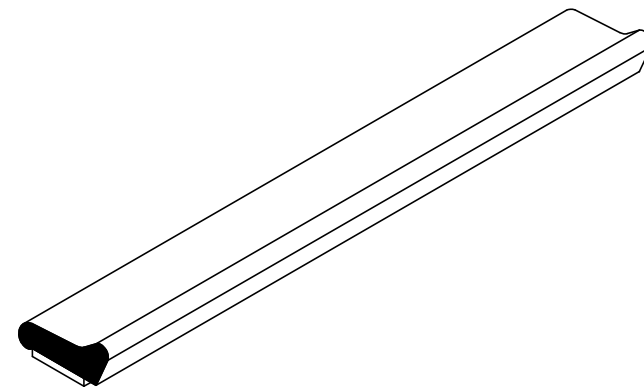

UNI-GRIP, INC.

9823 STATE ROUTE 53 N
UPPER SANDUSKY, OHIO 43351

| | | | | | |
|--|---|------------------|--------------------------------|-----------------|--------------|
| PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED. | UNLESS OTHERWISE SPECIFIED: | TITLE: | | | |
| | DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3 | SD-208-T | | | |
| | WEIGHT 0.037 LB/FT | | | | |
| DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(111416) | ASTM D1056 2A4 | SIZE A | DWG. NO. UG-1-TS-375-TP-083 | REV A | |
| | ASTM D2000 N/A | SCALE: 1:1 | DR. BY C. VENT | DATE 5/22/2018 | SHEET 1 OF 1 |