
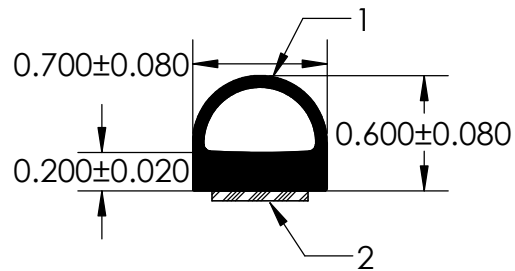


NOTES:

- 1) CLOSED CELL EPDM SPONGE RUBBER (0.725 G/CM³)
- 2) 1/2" 3M ST-1200 HEAT ACTIVATED TAPE (0.010 LB/FT)

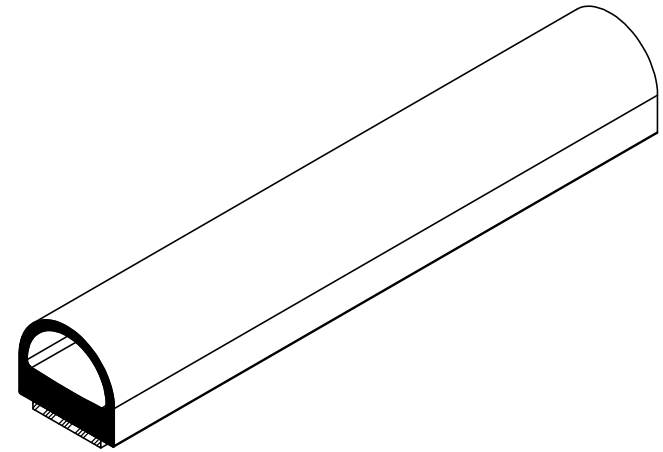

UNI-GRIP, INC.

9823 STATE ROUTE 53 N
UPPER SANDUSKY, OHIO 43351

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3	TITLE: <h2 style="text-align: center;">SD-212-T</h2>		
	WEIGHT <h3 style="text-align: center;">0.075 LB/FT</h3>	SIZE <h2 style="text-align: center;">A</h2>	DWG. NO. <h3 style="text-align: center;">UG-1-TS-500-TP-060</h3>	REV <h2 style="text-align: center;">A</h2>
DOCUMENT CONTROL NUMBER <h3>UG-1-EN-001-FR-(111416)</h3>	ASTM D1056 <h3 style="text-align: center;">2A3</h3>			
	ASTM D2000 <h3 style="text-align: center;">N/A</h3>			
SCALE: 1:1		DR. BY C. VENT	DATE 12/11/2017	SHEET 1 OF 1