
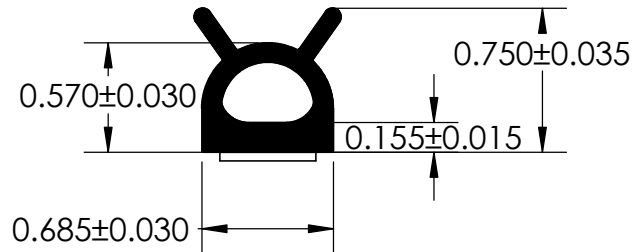


NOTES:

- 1) CLOSED CELL EPDM SPONGE RUBBER (0.750 G/CM³)
- 2) 1/2" 3M ST-1200 HEAT ACTIVATED TAPE (0.010 LB/FT)

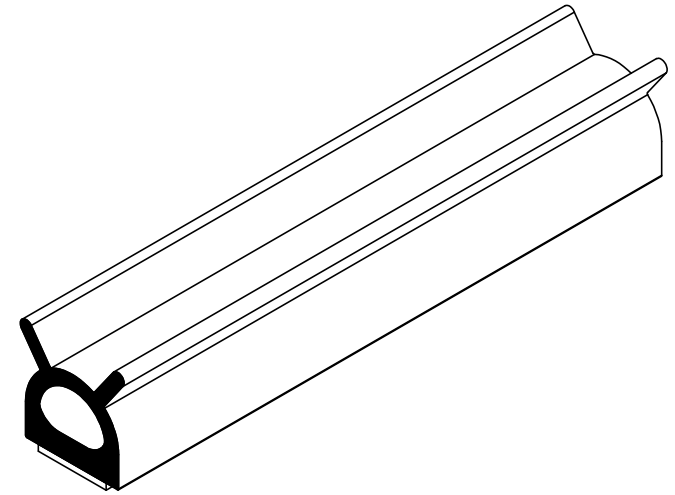

UNI-GRIP, INC.

9823 STATE ROUTE 53 N
UPPER SANDUSKY, OHIO 43351

REVISION BLOCK				PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED. DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(080918)	UNLESS OTHERWISE SPECIFIED:		TITLE: SD-331-T			
REV.	DATE	By	CHANGES MADE		DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3					
A	08/09/18	GS	Added a revision block to template		WEIGHT 0.098 LB/FT		SIZE A	DWG. NO. UG-1-TS-500-TP-098		REV A
B					ASTM D1056 2A4					
C					ASTM D2000 N/A					
D				SCALE: 1:1		DR. BY C. VENT		DATE 10/11/2018		
E				P:\Engineering\Prints\Tape Seals\SD-331-T UG-1-TS-500-TP-098		SHEET 1 OF 1				