
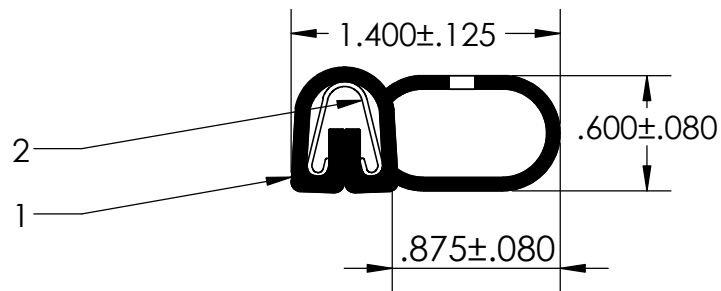


NOTES:

- 1) CLOSED CELL EDPM SPONGE RUBBER (0.700 G/CM³)
- 2) SD-487 SPRING STEEL CARRIER (0.030 LB/FT)
- 3) .125" VENT HOLES

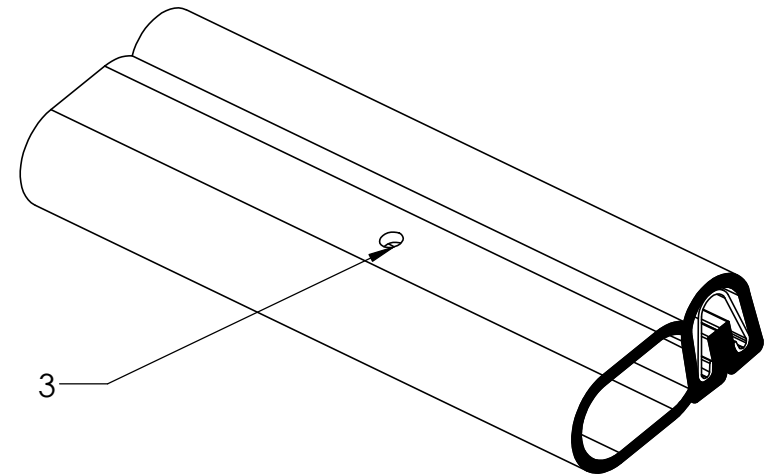

UNI-GRIP, INC.

9823 STATE ROUTE 53 N
UPPER SANDUSKY, OHIO 43351

REVISION BLOCK				PROPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:	TITLE:		
REV.	DATE	REVIEWED BY	CHANGES MADE	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3	SD-504 W		
A								
B								
C				WEIGHT	0.127 LB/FT	SIZE	DWG. NO.	REV
D				DOCUMENT CONTROL NUMBER	ASTM D1056 2A4	A	UG-1-BL-487-ST-063	A
E				UG-1-EN-001-FR-(103018)	ASTM D2000 N/A	DR. BY	C. VENT	DATE
P:\Engineering\Prints\Bulb Seals\UG-1-BL-487-ST-063				SCALE:	1:1	DATE	6/3/2019	SHEET 1 OF 1