
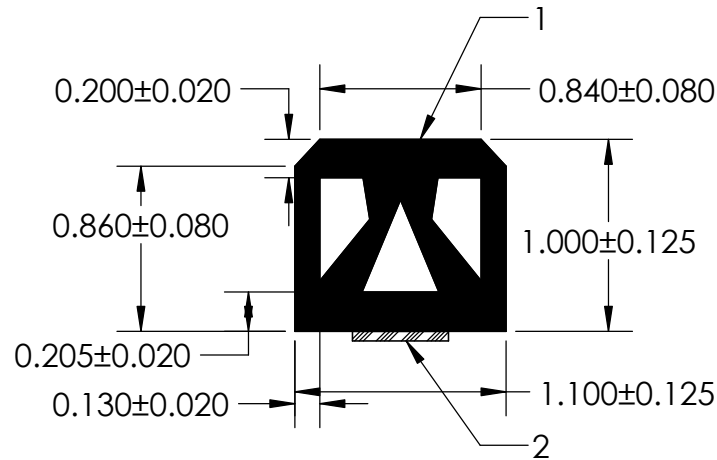


NOTES:

- 1) CLOSED CELL EPDM SPONGE RUBBER (0.536 G/CM<sup>3</sup>)
- 2) 1/2" 3M ST-1200 HEAT ACTIVATED TAPE (0.010 LB/FT)

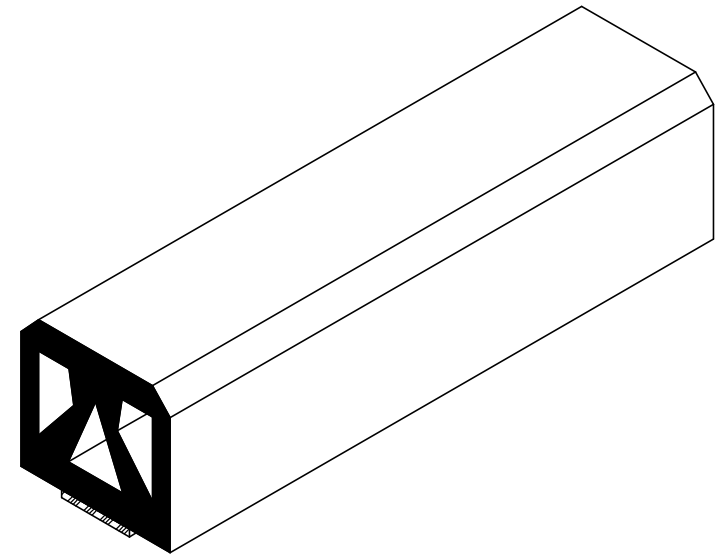

**UNI-GRIP, INC.**

9823 STATE ROUTE 53 N  
UPPER SANDUSKY, OHIO 43351

PROPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3
	WEIGHT <b>0.195 LB/FT</b>
	ASTM D1056 <b>2A3</b>
DOCUMENT CONTROL NUMBER <b>UG-1-EN-001-FR-(111416)</b>	ASTM D2000 <b>N/A</b>

TITLE: <b>SD-777-T</b>		
SIZE <b>A</b>	DWG. NO. <b>UG-1-TP-500-TS-064</b>	REV <b>A</b>