
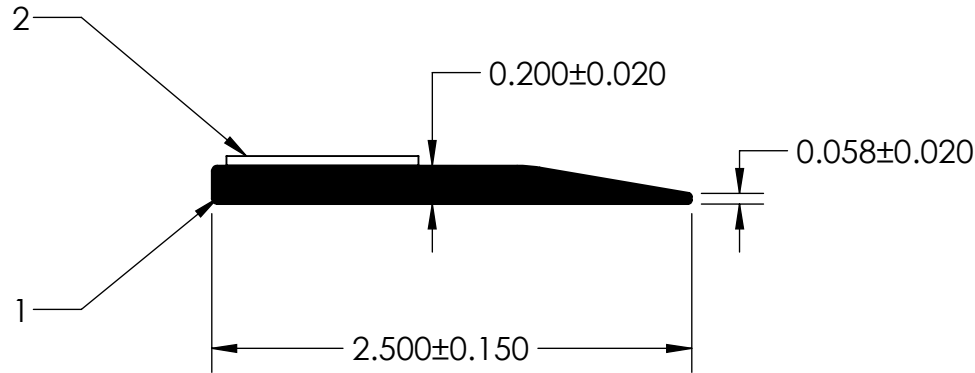


NOTES:

- 1) EPDM MICRO DENSE (0.865 G/CM<sup>3</sup>)
- 2) 1" ST-1200 3M HEAT ACTIVATED TAPE (0.017 LB/FT)

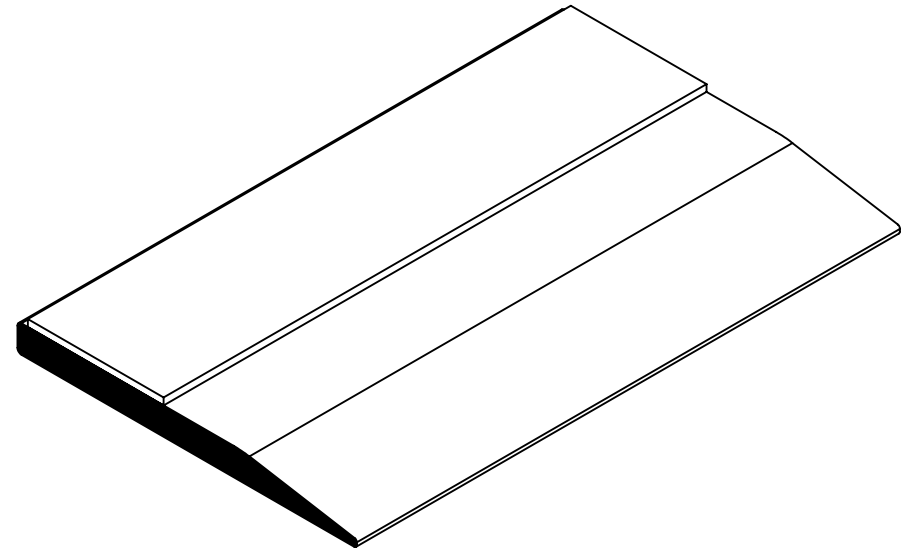

**UNI-GRIP, INC.**

9823 STATE ROUTE 53 N  
UPPER SANDUSKY, OHIO 43351

REVISION BLOCK				PROPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:	TITLE:				
REV.	DATE	R. By	CHANGES MADE	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 2	TH-250-T				
A										
B					WEIGHT	0.174 LB/FT				
C					ASTM D1056	N/A				
D					ASTM D2000	N/A				
E				DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(080918)	ASTM D2000	N/A				
P:\Engineering\Prints\Master Prints\Flap Seals\TH-250-T UG-1-FL-1000-TP-072				SCALE:	1:1	DR. BY	C. VENT	DATE	8/5/2021	SHEET 1 OF 1