

NOTES:

1) CLOSED CELL SPONGE RUBBER (DENSITY 0.827 G/CM³)





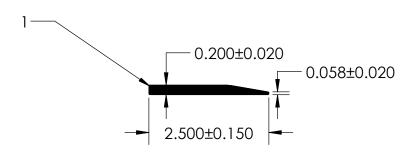

	PROPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:	TITLE:			
	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3			TH-250	
		O.157 LB/FT				
		ASTM D1056 2A4	SIZE DWG. NO.	DWG. NO.		REV
	DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(111416)	ASTM D2000 N/A		UG-1-FL-012	A	
P:\Engineering\Prints\Flap Seals\TH-250 UG-1-FL-012		SCALE: 1:2	DR. BY L.	CLARK	DATE 1/3/2017	SHEET 1 OF 1