
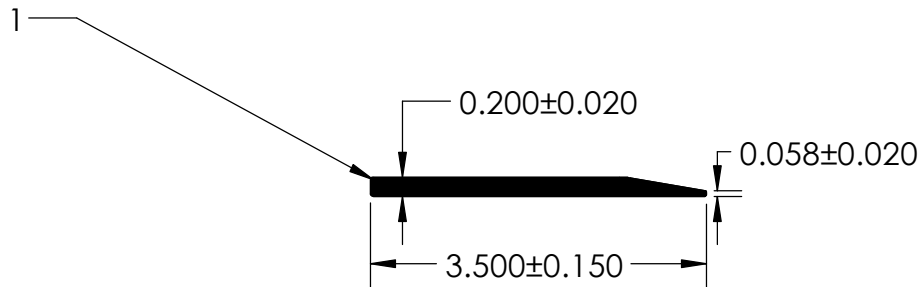


NOTES:

1) CLOSED CELL SPONGE RUBBER (DENSITY 0.827 G/CM³)

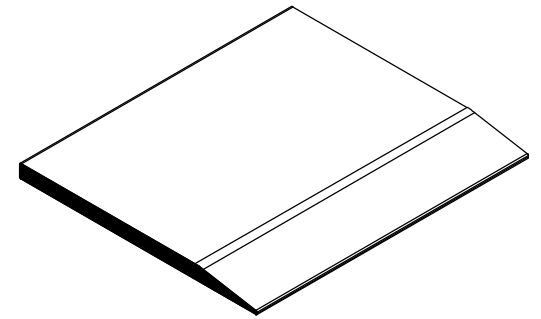

UNI-GRIP, INC.

9823 STATE ROUTE 53 N
UPPER SANDUSKY, OHIO 43351

| | | | | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|-----------------|---------------|--------------|
| PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED. | UNLESS OTHERWISE SPECIFIED: | TITLE: | | |
| | DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 3 | TH-530 | | |
| | WEIGHT 0.229 LB/FT | SIZE | DWG. NO. | REV |
| DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(111416) | ASTM D1056 2A4 | A | UG-1-FL-010 | A |
| | ASTM D2000 N/A | | | |
| P:\Engineering\Prints\Flap Seals\TH-530 UG-1-FL-010 | | DR. BY L. CLARK | DATE 1/3/2017 | SHEET 1 OF 1 |