
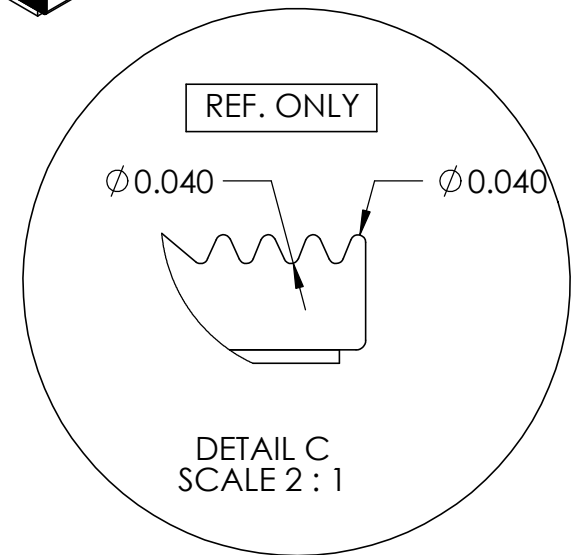
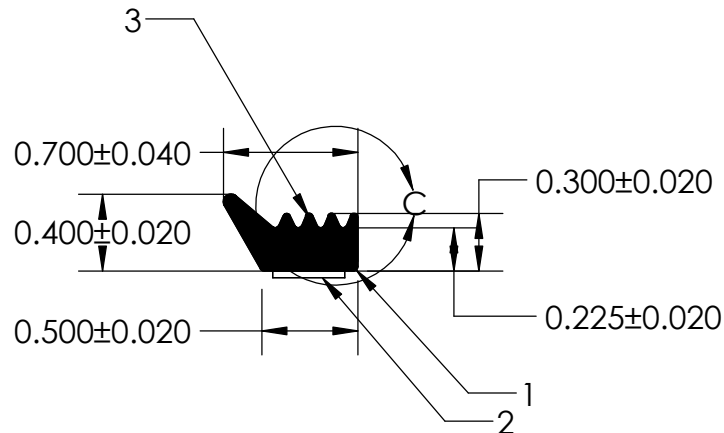


NOTES:

- 1) CLOSED CELL EPDM SPONGE RUBBER (0.250 G/CM³)
- 2) 3/8" ST-1200 3M HEAT ACTIVATED TAPE (0.006 LB/FT)
- 3) SLIP COAT

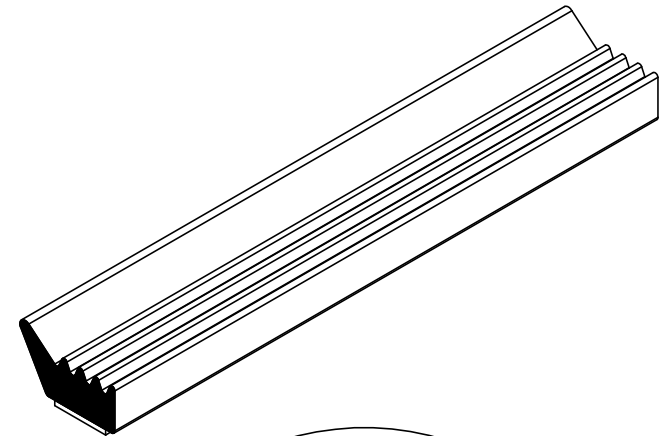

UNI-GRIP, INC.

9823 STATE ROUTE 53 N
UPPER SANDUSKY, OHIO 43351

REVISION BLOCK				PROPRIETARY AND CONFIDENTIAL:	UNLESS OTHERWISE SPECIFIED:	TITLE:			
REV.	DATE	R. By	CHANGES MADE	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF UNI-GRIP, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF UNI-GRIP, INC. IS PROHIBITED.	DIMENSIONS ARE IN INCHES TOLERANCES PER ARPM CLASS 2	TS-212			
A									
B					WEIGHT	SIZE A DWG. NO. UG-1-TS-375-TP-212 REV DR. BY C. VENT DATE 3/7/2022 SHEET 1 OF 1			
C					ASTM D1056				2A2
D					ASTM D2000				N/A
E				DOCUMENT CONTROL NUMBER UG-1-EN-001-FR-(080918)					
P:\Engineering\Prints\Master Prints\Tape Seals\TS-212 UG-1-TS-375-TP-212				SCALE:	1:1				